



# AXEL

## SPECIFICATIONS



IP 66 IK 10

PRODUCT NAME	AXEL
HOUSING	Moulded aluminium base Tubular steel column Ø 168 mm
BOWL	Clear polycarbonate, Ø 170 mm
FINISH	Polyester powder coating, any colour available
SOURCES	AXEL
COLOUR TEMPERATURE	2200 K, 2700 K or 3000 K (others on request)
OPTICAL	QUADRALENS
FLUX & POWER**	Up to 5628lm; 51W
ELECTRICAL CLASS	Class I or II
WIRING	Factory pre-wiring

\*\*At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)




- ▶ Smart-ready® (ZD4i)
- ▶ Dimming
- ▶ Detection
- ▶ WIZARD management system (pag. 420)

## MECHANICAL INTERFACES



Post top

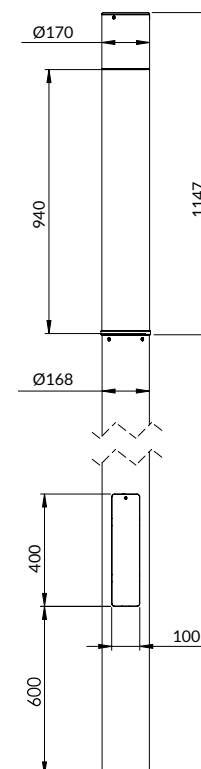

## BACK LIGHT REDUCTION OPTIONS



Cross pattern blackout



Venga decorative motifs



180° or 360° back shield depending on study.



AXEL

Configuration

Column  
Column Strium  
**HELIX**  
Height: 4m



AXEL

Configuration

Column  
Decorative shield  
Venga 360°  
Height: 4m



AXEL

Configuration

Column  
Column Strium  
**CAPITAN**  
Height: 4m



# AXEL

