



AXESS

SPECIFICATIONS

 RoHS

 Zd4i

IP 66

IK 10

PRODUCT NAME	AXESS
HOUSING	Die-cast aluminium body with openwork shape
BOWL	Clear flat structured polycarbonate bowl
FINISH	Polyester powder coating, any colour available
SOURCES	BLS strips
COLOUR TEMPERATURE	Amber*, 2200 K, 2400 K, 2700 K, 3000K, 4000 K
OPTICAL	QUADRALENS
FLUX & POWER**	Up to 7610lm; 51W
ELECTRICAL CLASS	Class I or II
MOUNTING	Post top



*Approx. 1800K

**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)



- ▶ Smart-ready® (Zd4i)
- ▶ Dimming
- ▶ Detection
- ▶ Moonlight technology
- ▶ Tunable white options
- ▶ WIZARD management system (pag. 420)

MECHANICAL INTERFACES

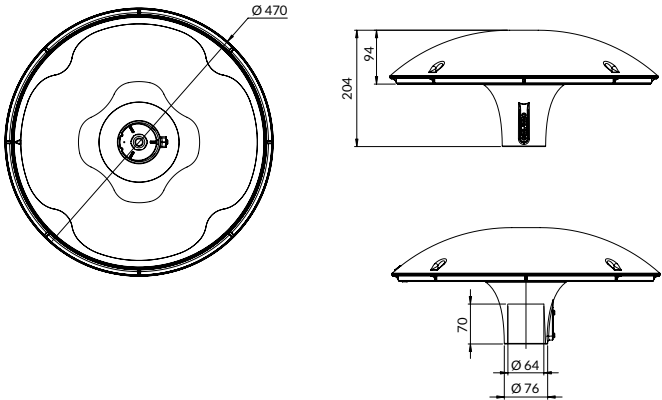



ECLATEC

AXESS



Configuration

AXESS

Column height: 3.5m



Configuration

AXESSColumn Strium **CAPITAN**
Column height: 4m

Configuration

AXESSSublimated timber column
Column height: 3.5m