




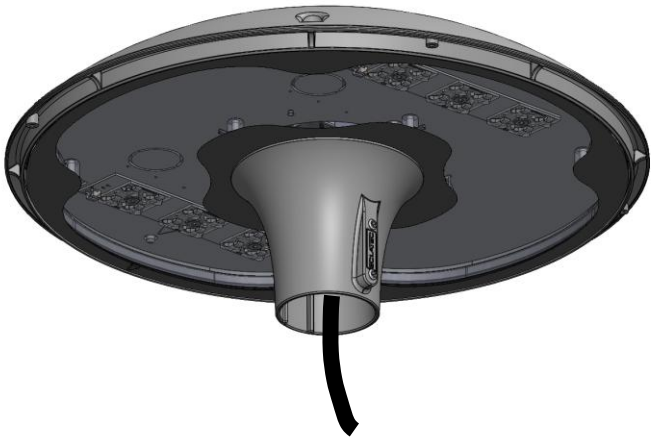

AXESS
(with power cable)

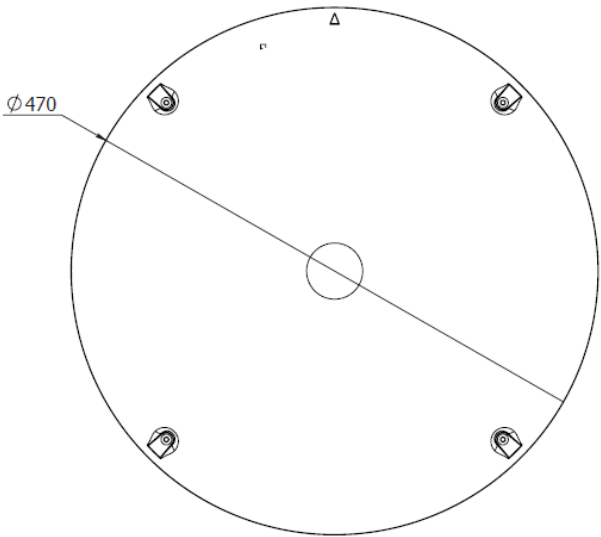


	IP66	
	or	RoHS
220-240 V 50 Hz		
IK		SCx
10	5.4 kg	0.044 m ²

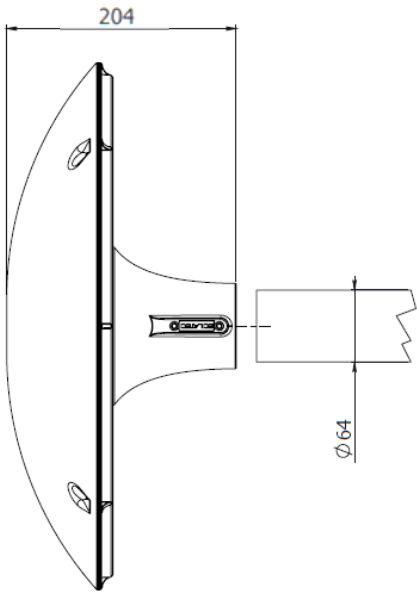


The light source contained in this luminaire must only be replaced by the manufacturer, its maintenance agent or a person with equivalent qualifications.


A1

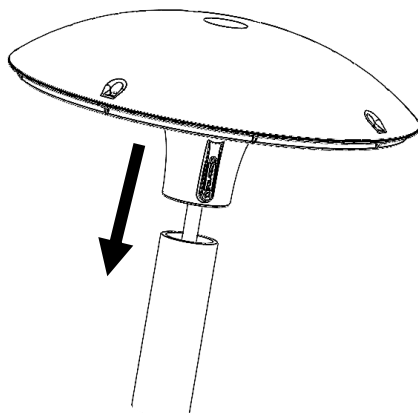

A2

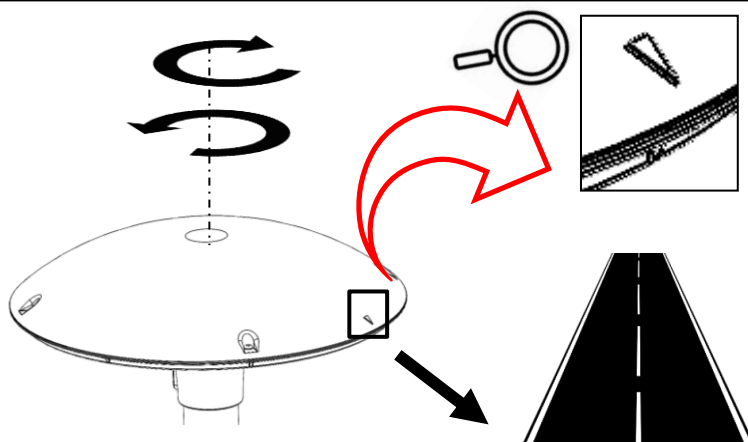

A3

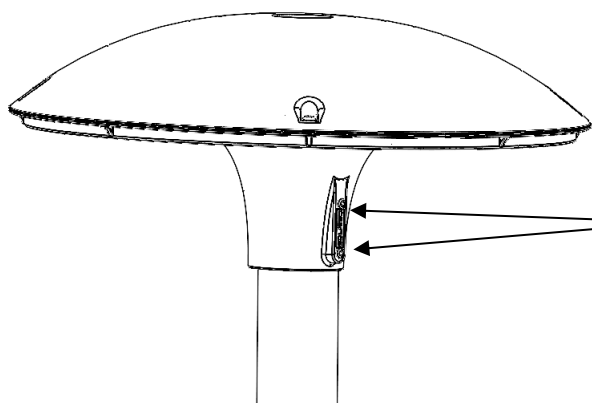


T25
2x

8 N·m ±1


Go to step C1

The light source contained in this luminaire must only be replaced by the manufacturer, its maintenance agent or a person with equivalent qualifications.

AXESS (**WITHOUT** power cable)

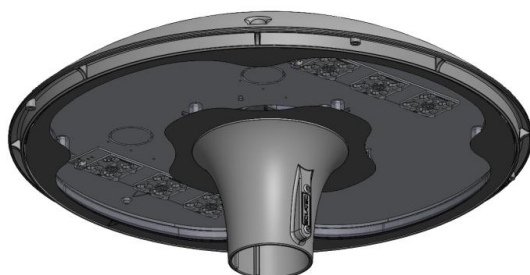


Recommended specialist tools

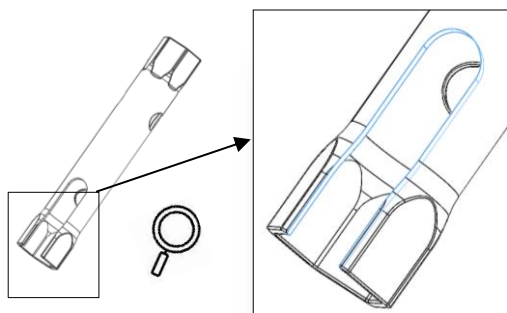


Straight slotted pipe spanner to allow space for the strand when tightening the PE

B1

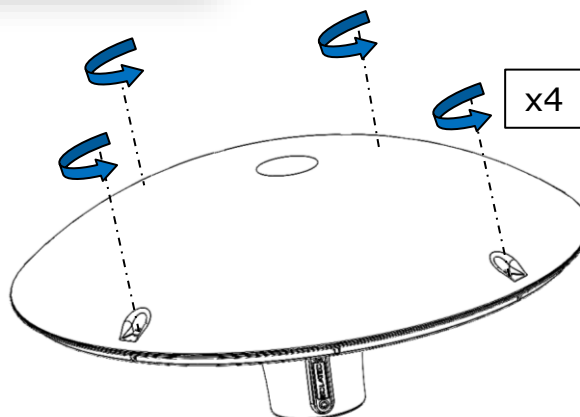


B2

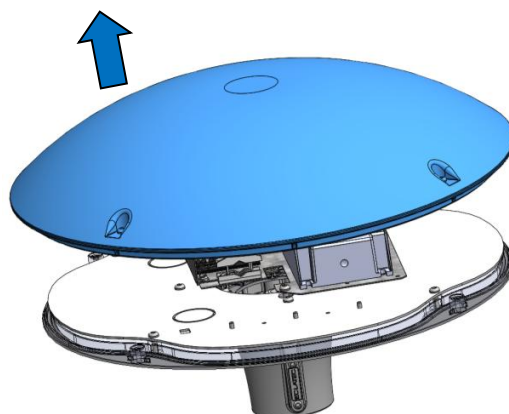


The light source contained in this luminaire must only be replaced by the manufacturer, its maintenance agent or a person with equivalent qualifications.


B3

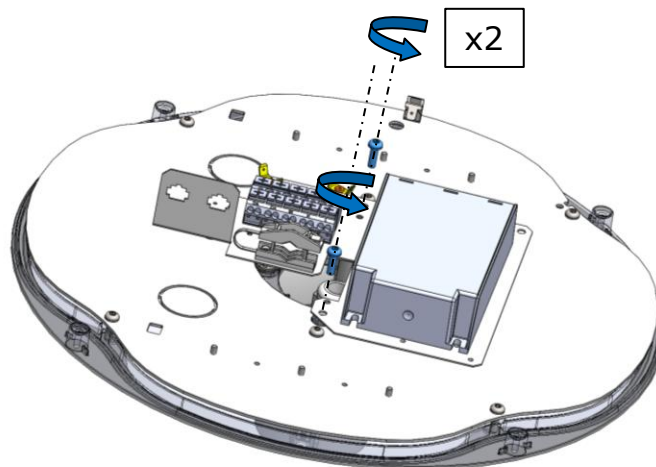

B4

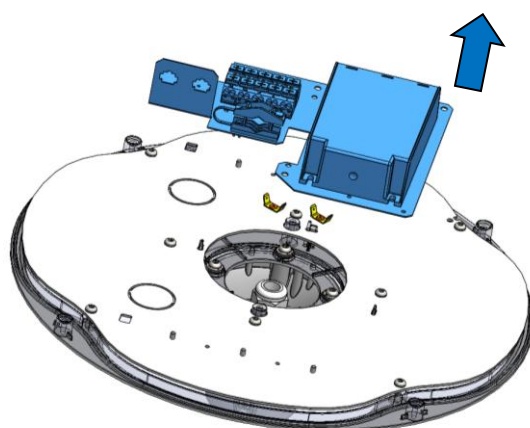


B5

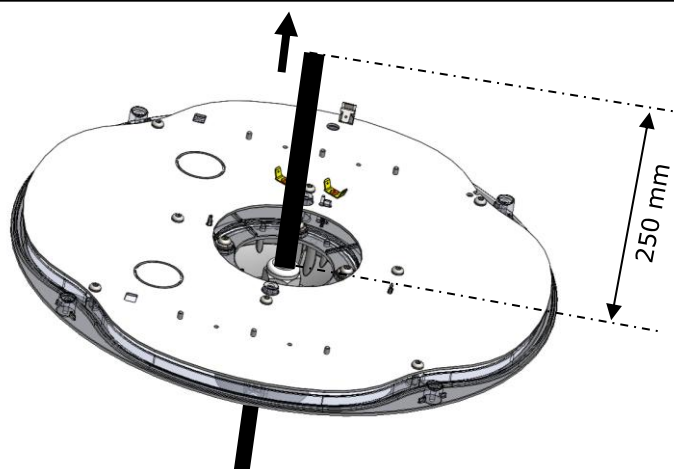


The light source contained in this luminaire must only be replaced by the manufacturer, its maintenance agent or a person with equivalent qualifications.

B6

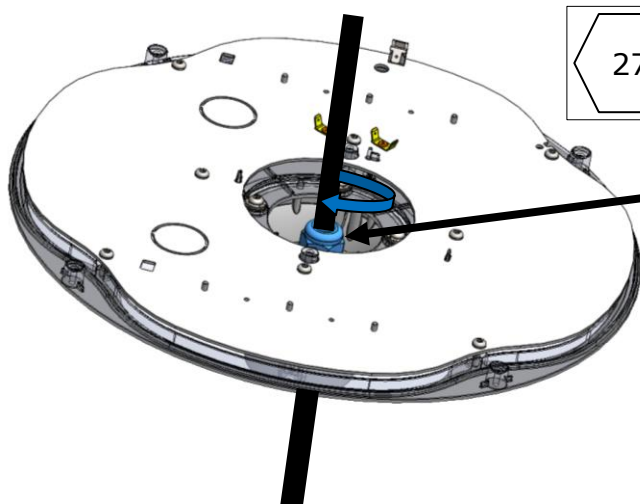


27

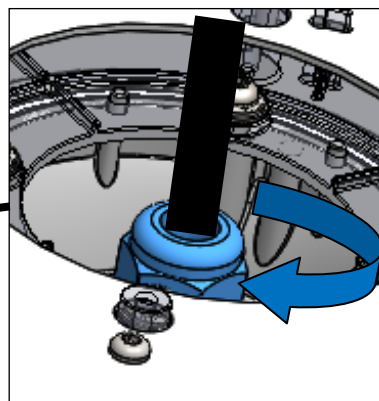


4 N·m $\pm$ 0,5

B7

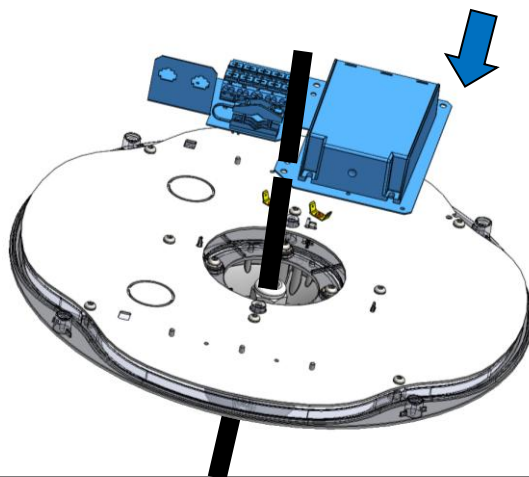

B8

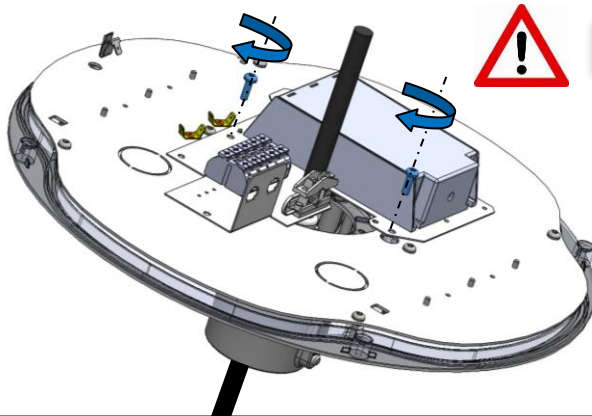


2 x 2 N·m $\pm$ 0,5

The light source contained in this luminaire must only be replaced by the manufacturer, its maintenance agent or a person with equivalent qualifications.


B9

Electrical connection

DALI wires at the base of the pole must be separated and insulated if they are not connected

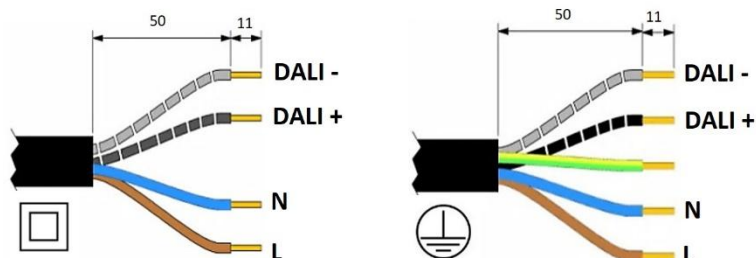


B10

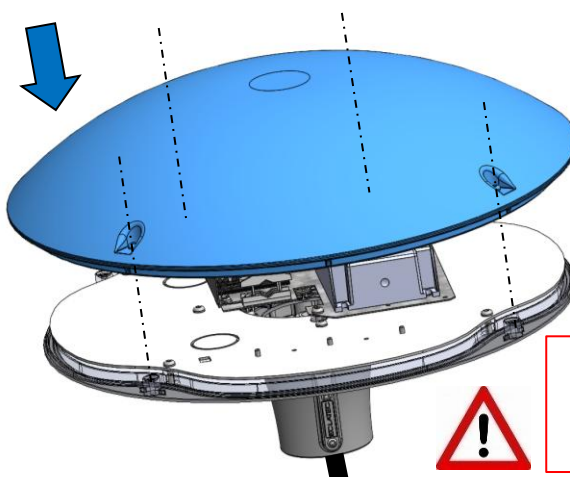

Ensure correct alignment during assembly

B11

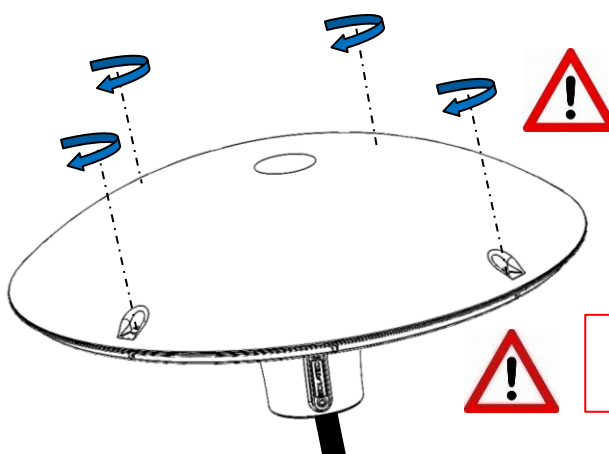


4 x 3 N·m ±0,5


Observe the tightening torque

The light source contained in this luminaire must only be replaced by the manufacturer, its maintenance agent or a person with equivalent qualifications.


B12

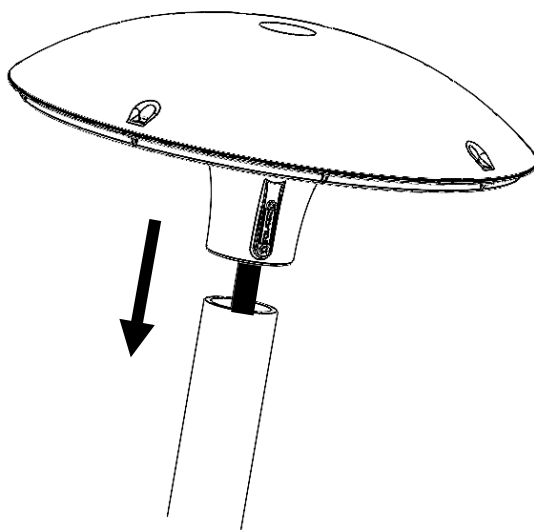

B13

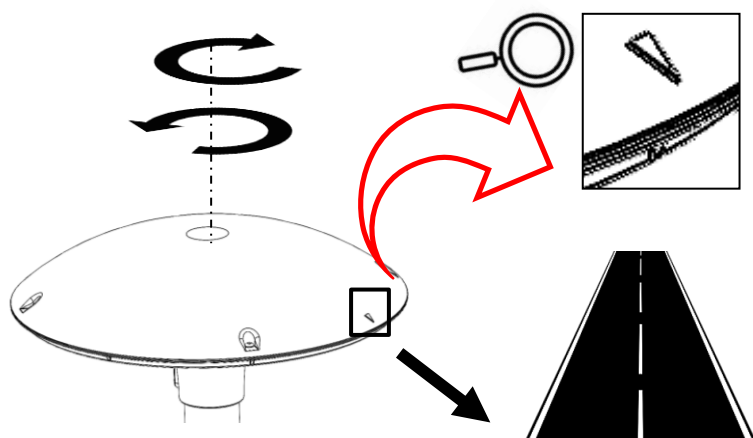

B14

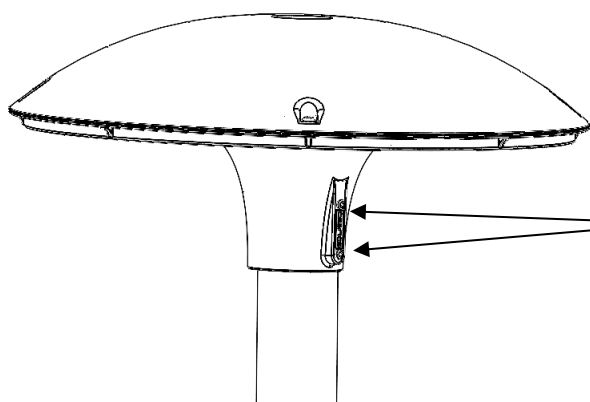

T25
2x



8 N·m ±1

Go to step C1

The light source contained in this luminaire must only be replaced by the manufacturer, its maintenance agent or a person with equivalent qualifications.

D1

OPTION: Adaptator Ø60 – Ø60x70

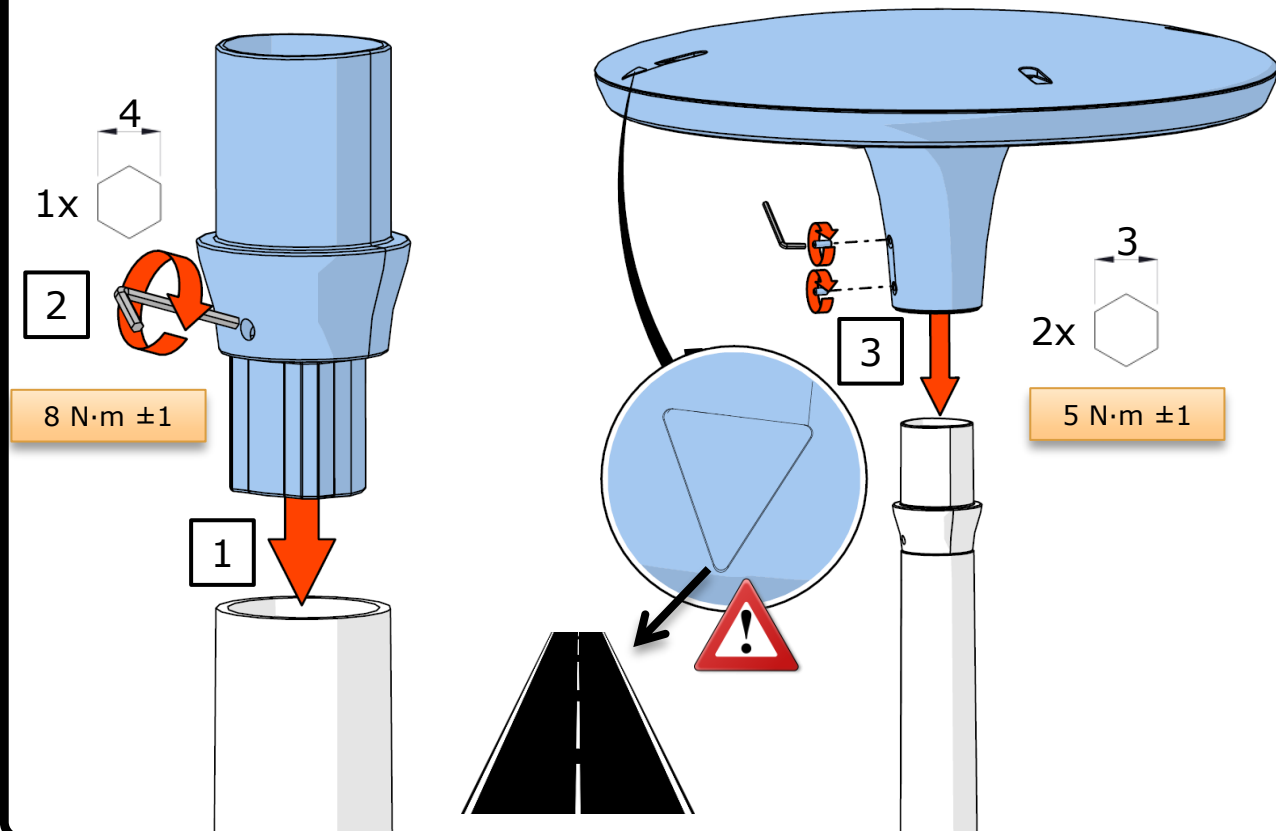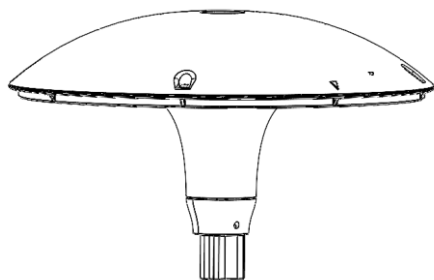

The light source contained in this luminaire must only be replaced by the manufacturer, its maintenance agent or a person with equivalent qualifications.