



GEMME

SPECIFICATIONS



PRODUCT NAME	GEMME
HOUSING	Injected die-cast aluminium
BOWL	Polycarbonate shallow clear (PCC) Thermally tempered and screen printed flat glass (VPS)
FINISH	Polyester powder coating, any colour available
SOURCES	GEMME
COLOUR TEMPERATURE	2700K, 3000K or 4000K
OPTICAL	ORALENS
BACKLIGHT SHIELD	Medium or high as an option
FLUX & POWER**	Up to 6682lm; 56W
ELECTRICAL CLASS	Class I or II
WIRING	Pre-wired at the factory
MOUNTING	Post top

**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)




- ▶ Smart-ready® (Zd4i)
- ▶ Dimming
- ▶ Detection
- ▶ WIZARD management system (pag. 420)

MECHANICAL INTERFACE




POST TOP

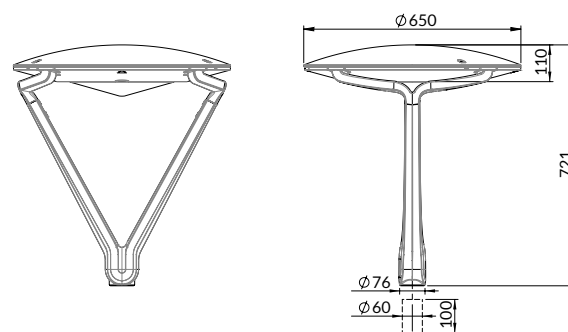



Configuration

GEMME (VPS)
GEMME column
Column height: 5m



Configuration

GEMME (PCC)
GEMME column
Column height: 4m



Configuration

GEMME (VPS)
Column height: 5m

GEMME

