



LEXIK

SPECIFICATIONS

RoHS

Zd4i

IP 66

IK 09

Tool-less opening

PRODUCT NAME	LEXIK 1	LEXIK 2
HOUSING	Injection die-cast aluminium body	
BOWL	Thermally tempered and screen printed flat glass	
FINISH	Polyester powder coating, any colour available	
SOURCES	BLS strips	
COLOUR TEMPERATURE	Amber*, 2200 K, 2400 K, 2700 K, 3000 K or 4000 K	
OPTICAL	QUADRALENS	
FLUX & POWER**	Up to 6517lm; 51W	Up to 17451lm; 123W
ELECTRICAL CLASS	Class I or II	
WIRING	Pre-wired at the factory	
MOUNTING	Post top, lateral	




*Approx. 1800K


**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)



- ▶ Smart-ready® (Zd4i)
- ▶ Dimming
- ▶ Detection
- ▶ Tunable white options
- ▶ WIZARD management system (pag. 420)


MECHANICAL INTERFACES



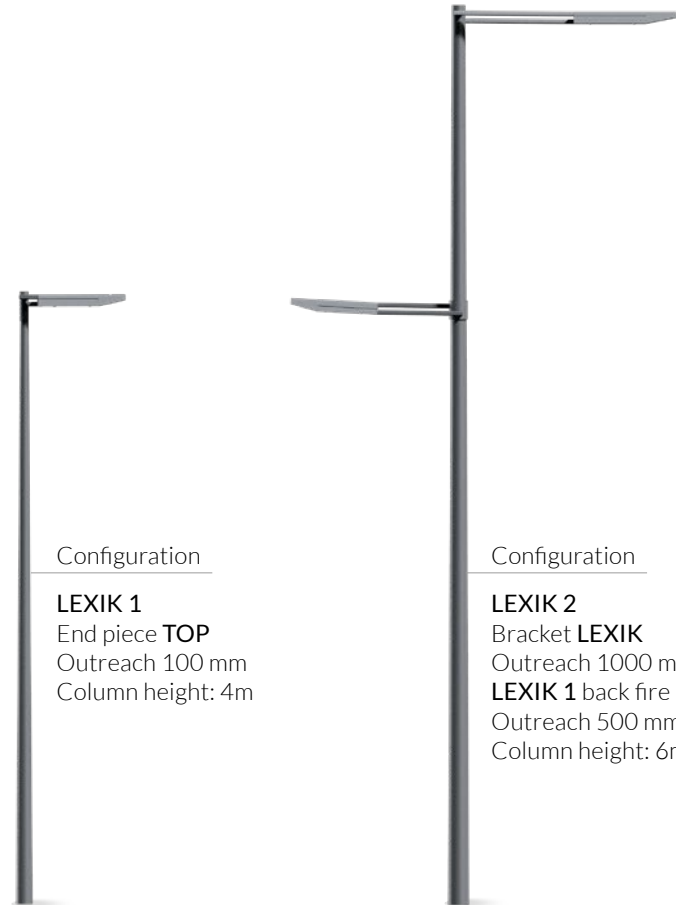

Configuration

LEXIK 1
End piece **TOP**
Outreach 100 mm
Column height: 4m

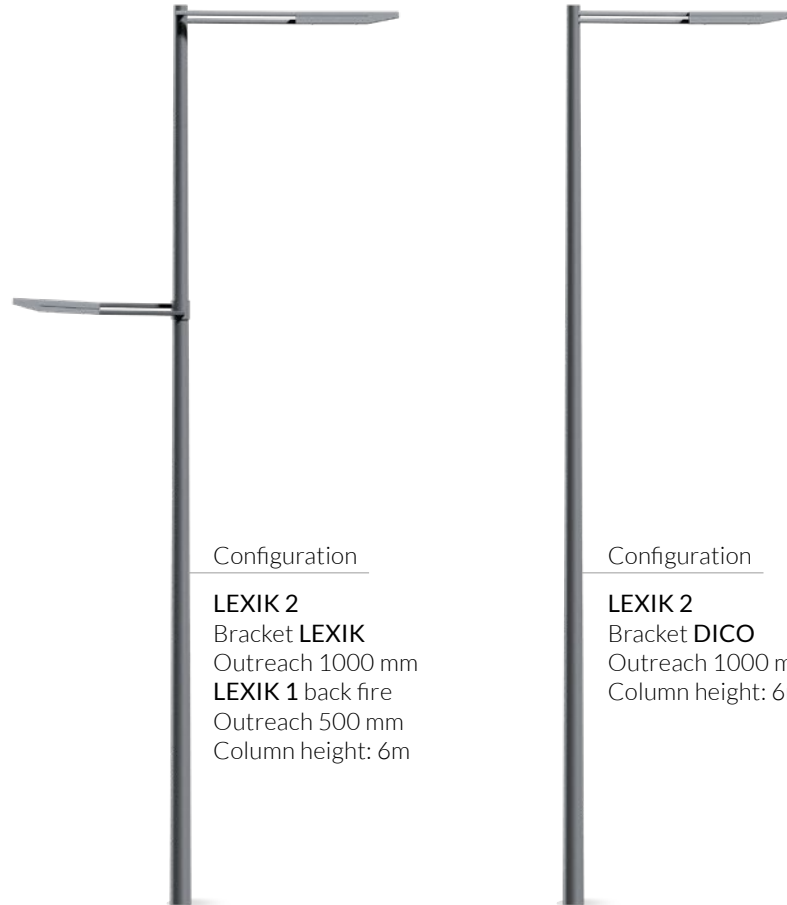

Configuration

LEXIK 2
Bracket **LEXIK**
Outreach 1000 mm
LEXIK 1 back fire
Outreach 500 mm
Column height: 6m



Configuration

LEXIK 2
U-bracket

