


ORNA 2

ORNA 1

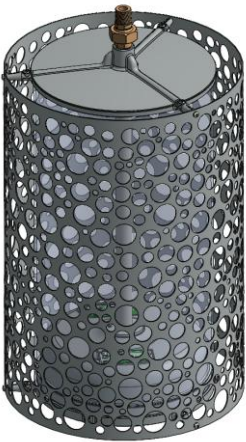


IP66

OR

RoHS



220–240 V 50 Hz

	IK	kg	SCx
ORNA 1	08	7.6 kg	0.10 m ²
ORNA 2	08	12 kg	0.19 m ²

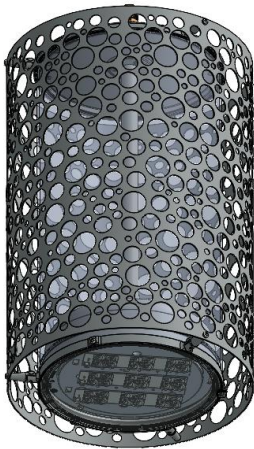


ORNA 1

ORNA 2

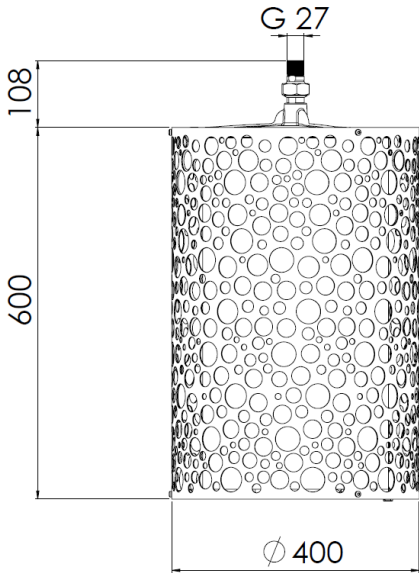


The light source contained within this luminaire must only be replaced by the manufacturer, its authorised service agent or a person with equivalent qualifications.


1

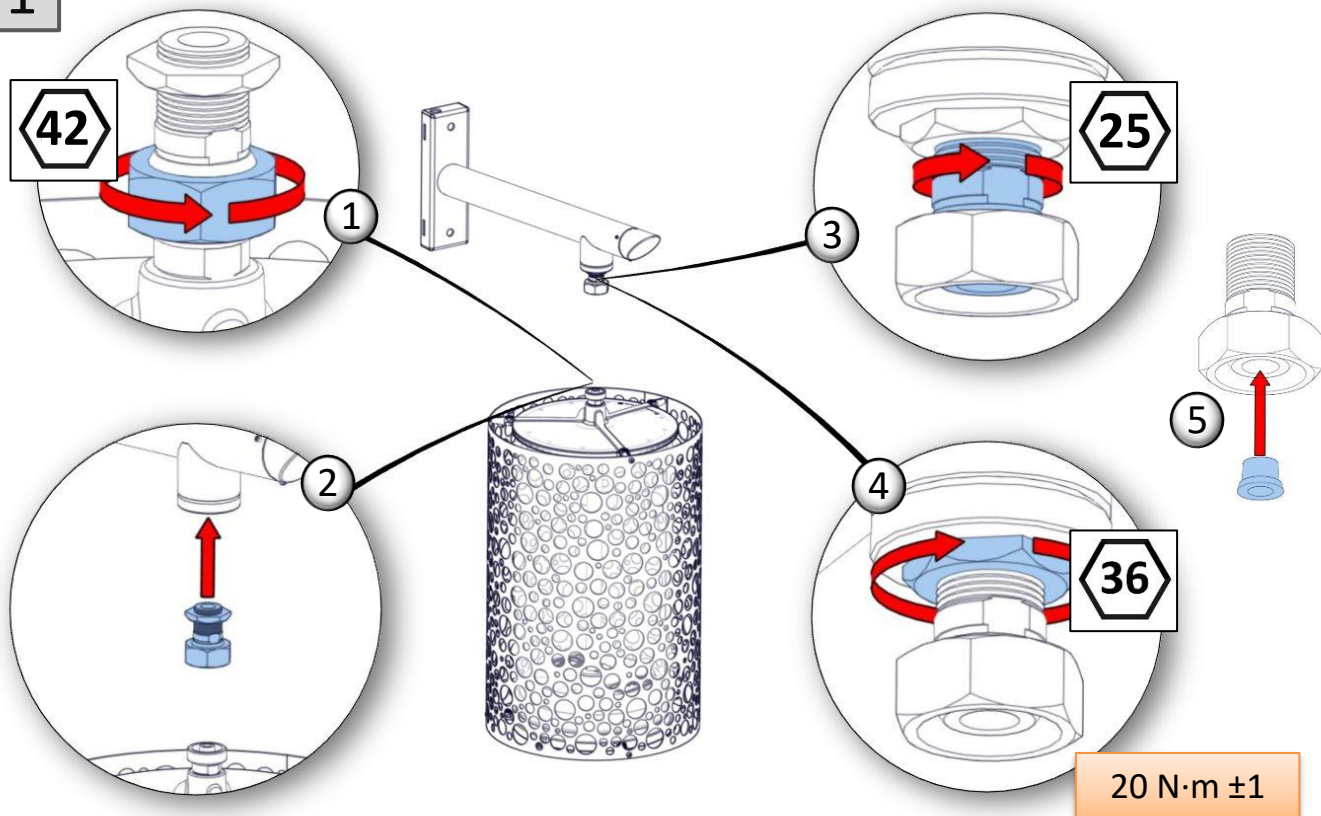

2

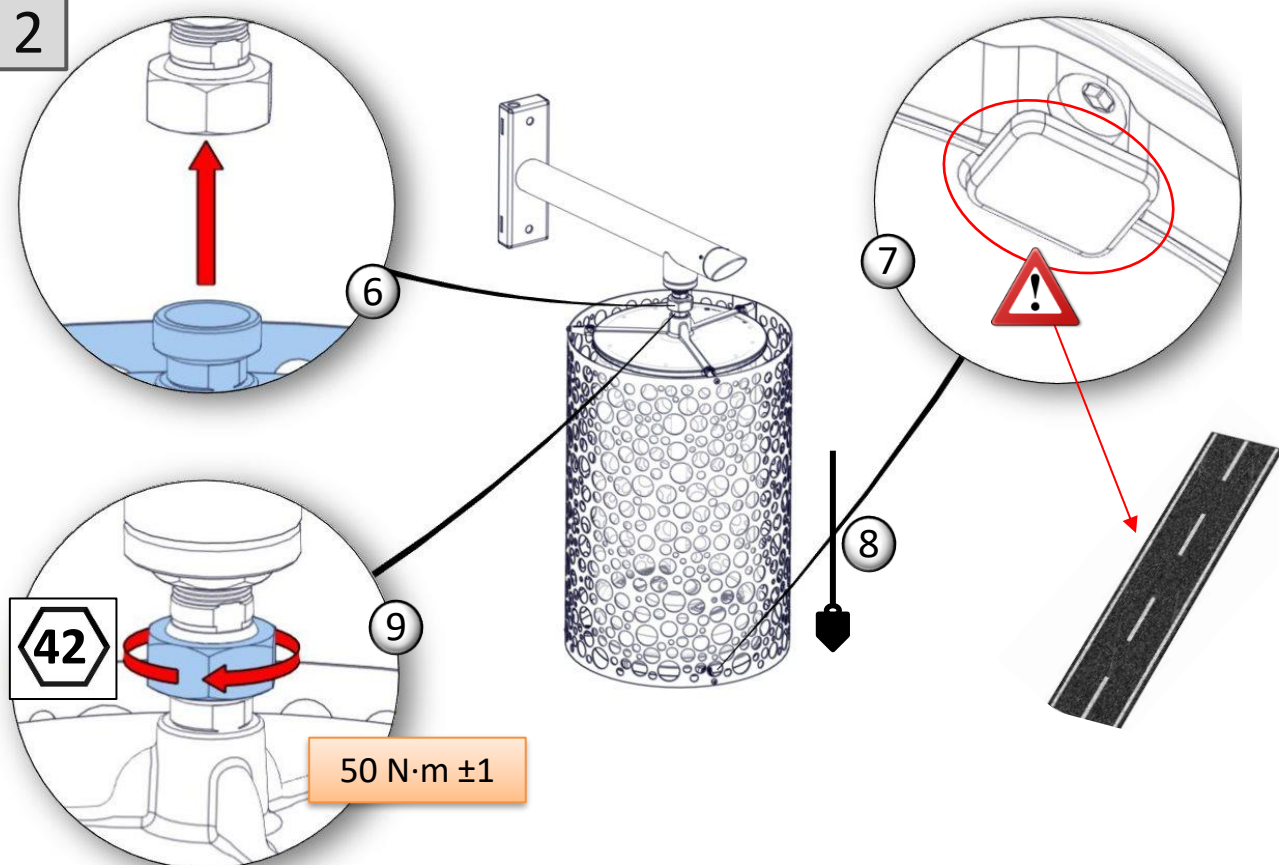

The light source contained in this luminaire must only be replaced by the manufacturer, its maintenance agent or a person with equivalent qualifications.

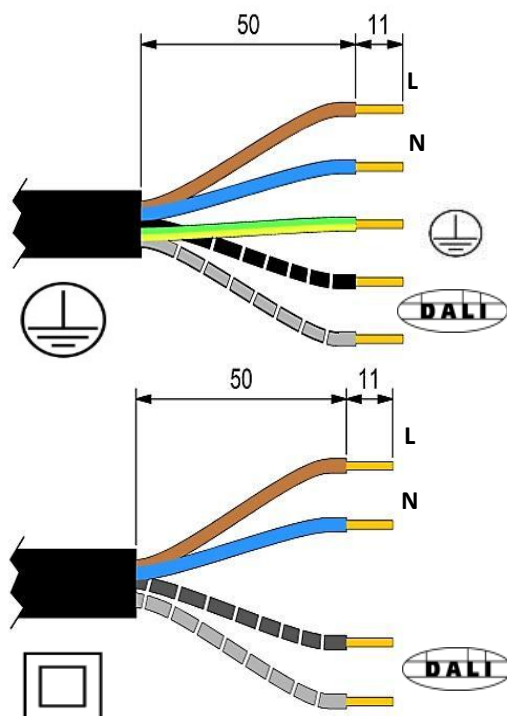

DMX

The DALI wires at the base of the post must be separated and insulated if they are not connected