

**Pico bracket:** steel, Ø 60 mm


Luminaire fixation: covering or penetrating (standard)

Penetrating fixing of the bracket in the pole


**Finish:** polyester powder coating, any colour available

**Pole:** cylindrical-conical steel Ø 60/62 mm


PICO

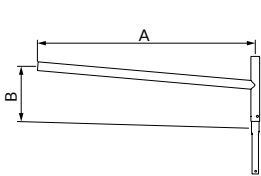


Pico bracket single light

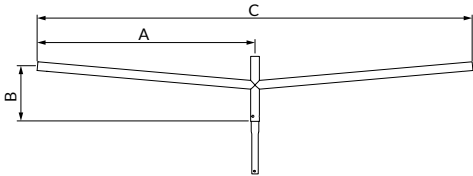

Pico bracket twin light



Pico wall bracket



Pico counter-light

PICO	A mm	B mm	C mm	D mm	Tilt	Weight Kg	SCx m²
Single light	800	390	-	-	5°	7	0.07
	1000	400	-	-	5°	8.25	0.07
	1200	410	-	-	5°	9.15	0.11
Twin light	800	390	1600	-	5°	11	0.12
	1000	400	2000	-	5°	13	0.17
	1200	410	4000	-	5°	15	0.20
Wall bracket	500	175	-	210	5°	1	0.03
Back light	500	175	-	210	5°	1	0.03

**BRACKETS**  
CONFIGURATION EXAMPLES



PICO



Enza Pico



Elipt Pico



Ixis Pico



Moana Pico



Tsana Pico




Murena Pico

## PICO




Enza Pico

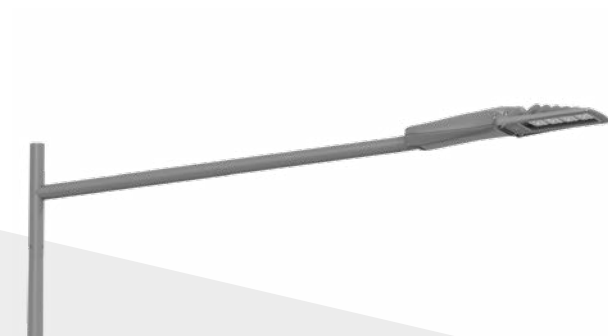

Tilt T Pico



Pixel Pico

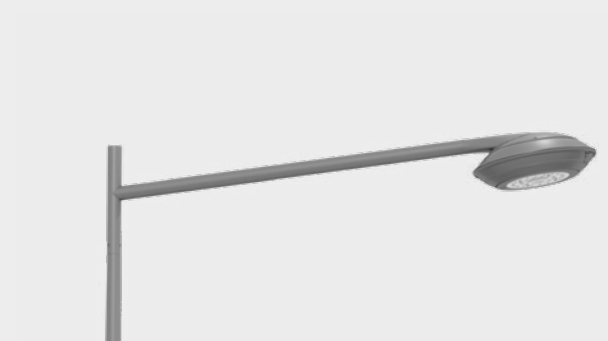

Graphic Pico index