



STELIUM

SPECIFICATIONS



PRODUCT NAME	STELIUM 1	STELIUM 2
HOUSING	Die-cast aluminium body	
BOWL	S version: bi-material grey and transparent bowl in PC X version: thermally toughened glass	
FINISH	Polyester powder coating, any colour available	
SOURCES	BLS strips	
COLOUR TEMPERATURE	Amber*, 2200 K, 2400 K, 2700 K, 3000K, 4000 K	
OPTICAL	QUADRALENS	
FLUX & POWER**	Up to 10 043lm; 75W	Up to 13 392lm; 98W
ELECTRICAL CLASS	Class I or II	
MOUNTING	Post top, lateral	


*Approx. 1800K

**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)




- ▶ Smart-ready® (Zd4i)
- ▶ Dimming
- ▶ Detection
- ▶ Moonlight technology
- ▶ Tunable white options
- ▶ WIZARD management system (pag. 420)


MECHANICAL INTERFACES




STELIUM 1

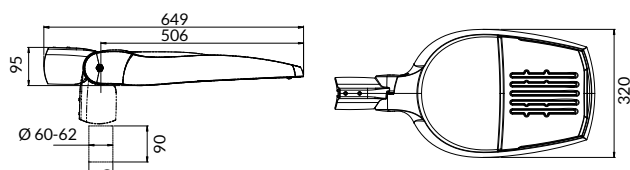

STELIUM 2

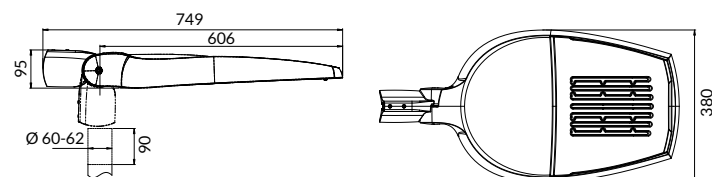

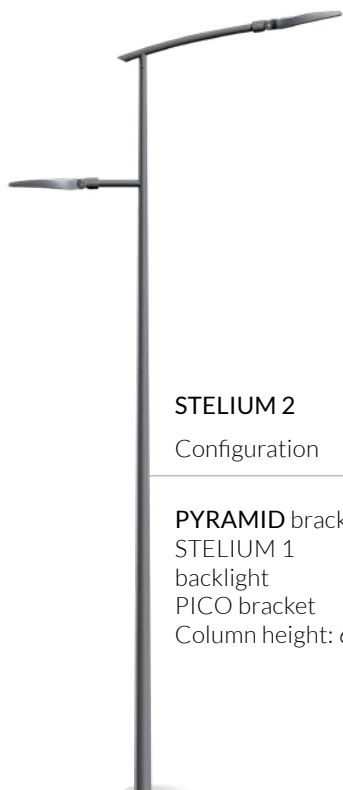

STELIUM 2

Configuration


PYRAMID bracket
STELIUM 1
backlight
PICO bracket
Column height: 6m



STELIUM 1

Configuration


Column height: 4m

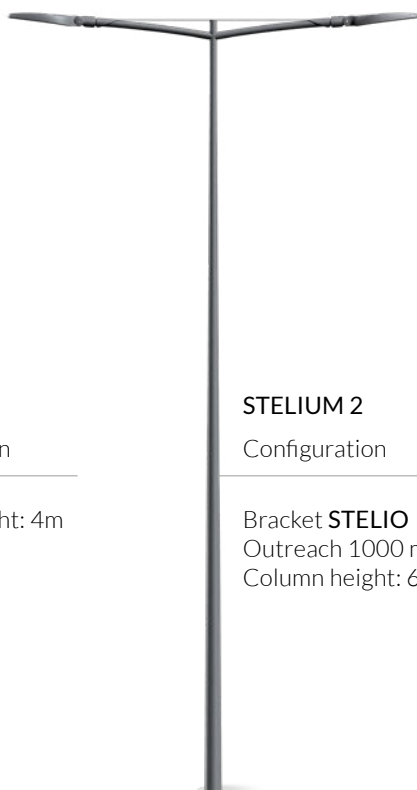

STELIUM 2

Configuration

Bracket **STELIO**
Outreach 1000 mm
Column height: 6m

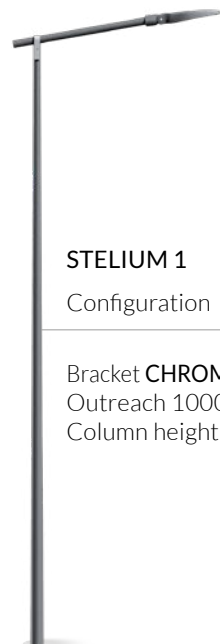

STELIUM 1

Configuration

Bracket **CHROME**
Outreach 1000 mm
Column height: 5m

STELIUM

