



Certified by DarkSky.org

TWEET NEO

SPECIFICATIONS



PRODUCT NAME	TWEET NEO 1	TWEET NEO 2
HOUSING	Die-cast aluminium body Version X: articulated bushing in die-cast aluminium	
FINISH	Polyester powder coating, any colour available	
BOWL	Version S: screen-printed in polycarbonate Version X: Thermally tempered glass	
SOURCES	BLS strips	
COLOUR TEMPERATURE	Amber*, 2200 K, 2400 K, 2700 K, 3000K, 4000 K	
OPTICAL	QUADRALENS	
FLUX & POWER**	Up to 10 043lm; 75W	Up to 13 392lm; 98W
ELECTRICAL CLASS	Class I or II	
MOUNTING	Post top, lateral	


*Approx. 1800K

**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5% tolerance)




- ▶ Smart-ready® (Zd4i)
- ▶ Dimming
- ▶ Detection
- ▶ Moonlight technology
- ▶ Tunable white options
- ▶ WIZARD management system (pag. 420)


MECHANICAL INTERFACES

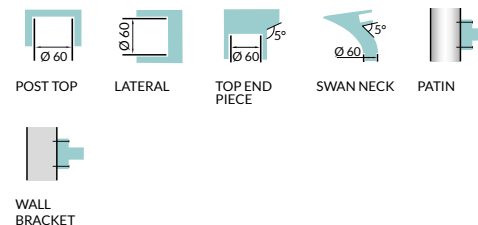


TWEET 1 «NEO»

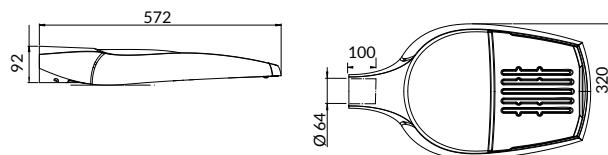


TWEET 2 «NEO»

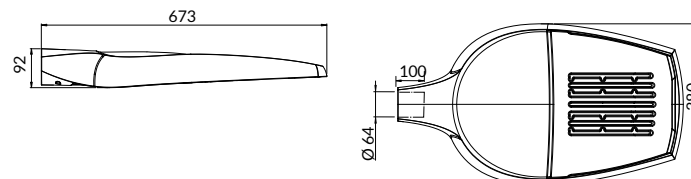

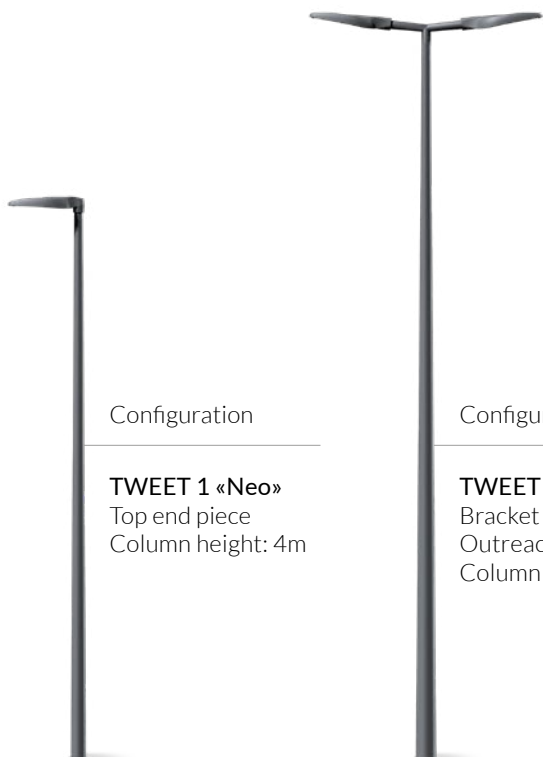

Configuration

TWEET 1 «Neo»
Top end piece
Column height: 4m

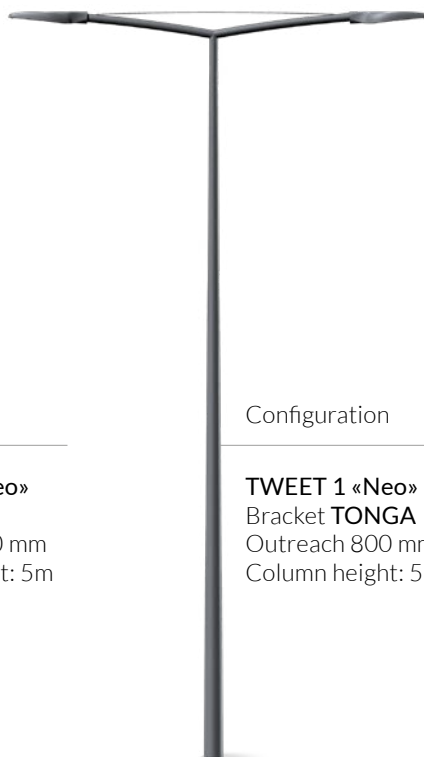

Configuration

TWEET 1 «Neo»
Bracket **KC**
Outreach 200 mm
Column height: 5m



Configuration

TWEET 1 «Neo»
Bracket **TONGA**
Outreach 800 mm
Column height: 5m

Configuration

TWEET 1 «Neo»
Swan neck
Column height: 5m

TWEET NEO

