





**Accord bracket:** aluminium, Ø 89 mm  
 Luminaire fixation: covering or penetrating (standard)  
 Lateral mounting of the light using a ball-and-socket joint  
 Styling fixing of the bracket on the pole  
**Finish:** polyester powder coating, any colour available  
**Pole:** special cylindrical-conical steel, Ø 110 mm with  
 Ø 90 x 110 mm reducer  
**Heights:** 6.5 m, 7.5 m, 8.5 m and 9.5 m


# ACCORD



Pico wall bracket




Pico wall bracket

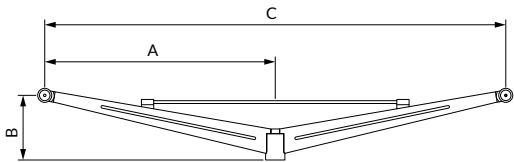

Pico wall bracket

ACCORD	A mm	B mm	C mm	D mm	Tilt	Weight Kg	SCx m²
Single light	600	330	-	-	20°	6	0.13
	1315	370	-	-	10°	10	0.22
Twin light	600	330	1200	-	20°	7.4	0.18
	1315	370	2630	-	10°	18	0.35
Wall bracket	285	135	-	220	-	2.1	0.03
	1315	420	-	500	10°	5.6	0.22


## ACCORD BRACKETS CONFIGURATION EXAMPLES

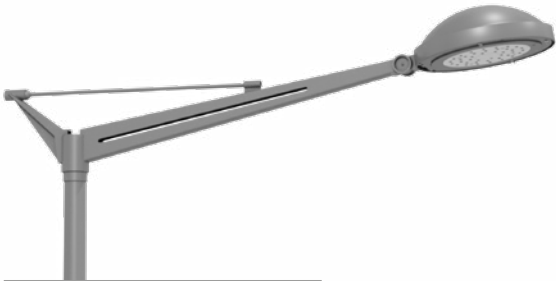


Chorus Accord




Elipt Accord

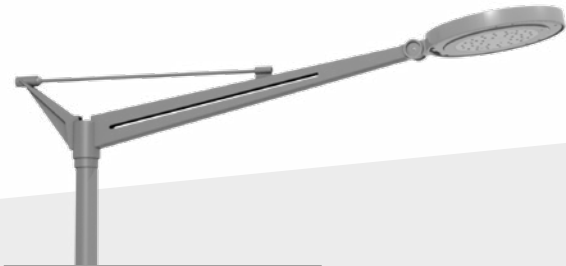

Tsana Accord

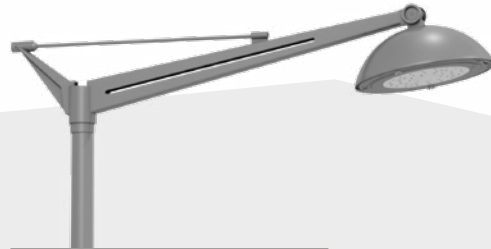

Metro Accord

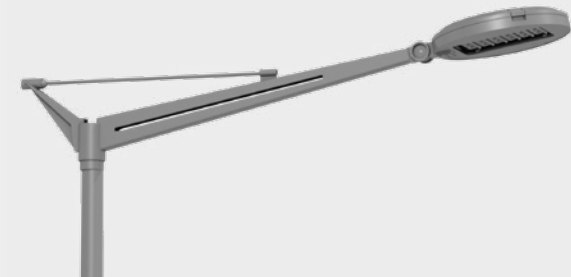

Tsana X Accord

## ACCORD

