



Upgradeable cylindrical cross section column, composed of a cast iron bollard (Shape obtained by moulding) and a steel extension.

BELLE EPOQUE

Fixing: 3 anchors Ø 18 mm.
Spacing: 120° on Ø 320 mm.
Light mounting heights
(top mounting): 3 m, 3.50 m and 4 m.
Light fixing: Ø 60 mm, Ø 27 pdg or
Ø 34 pdg.

Finishes: metallisation treatment
polyester powder coating

BELLE EPOQUE R


Fixing: 4 Ø 18 mm anchors.
Spacing: 200x200 mm.
Light mounting heights
(top mounting): 3 m, 3.50 m, 4 m and 4.50 m.
Light fixing: Ø 60 mm, Ø 27 pdg or
Ø 34 pdg.




BELLE EPOQUE
Bollard Dervois
PM



BELLE EPOQUE
Bollard Dervois
GM

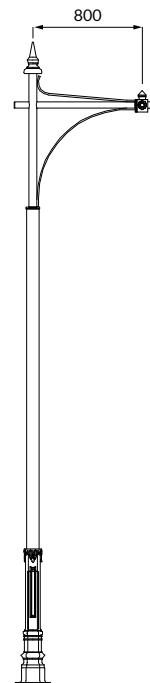

BELLE EPOQUE R
Bollard n°7

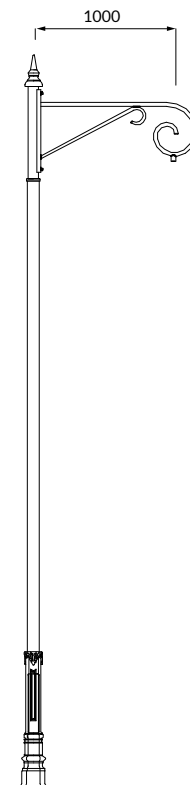

BELLE EPOQUE R
Bracket Paris I

BELLE EPOQUE



BELLE EPOQUE COLUMNS CONFIGURATION EXAMPLES




BELLE EPOQUE



BELLE EPOQUE

Configuration

Light:
Chenonceaux II
Height:
3.50 m
Bollard:
Dervois PM

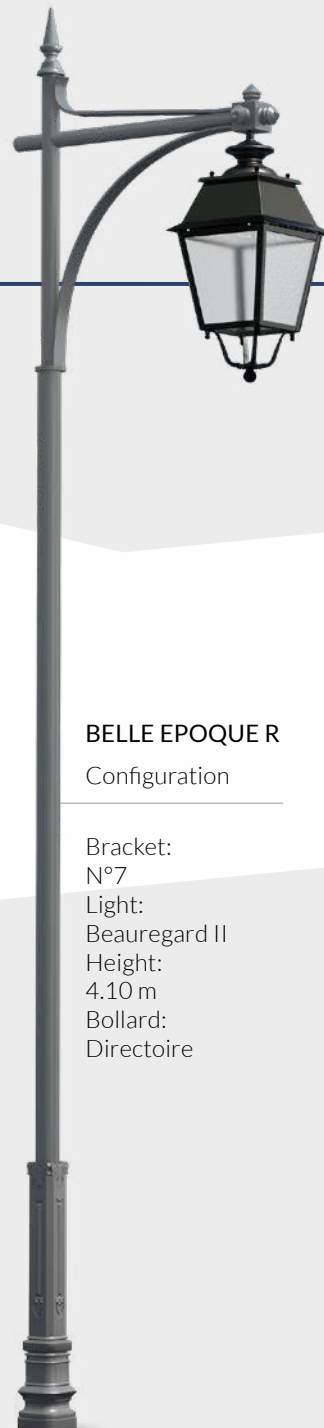


BELLE EPOQUE R

Configuration

Bracket:
N°7
Light:
Beauregard II
Height:
4.10 m
Bollard:
Directoire

BELLE EPOQUE

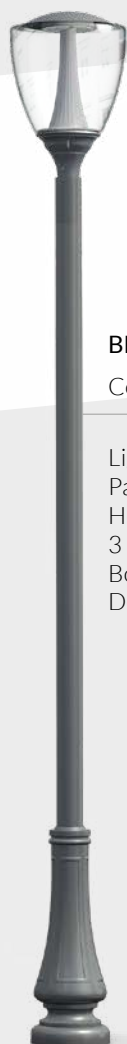**BELLE EPOQUE**

Configuration

Light:
Palma
Height:
3 m
Bollard:
Dervois GM

**BELLE EPOQUE R
LIGHTING SET:
PARIS I**

Configuration

Light:
Stanza
Height:
4.60 m
Bollard:
Directoire

**BELLE EPOQUE****BELLE EPOQUE R**