



Galvanised steel bracket, 5° tilt.

CEANO PM

Light fixing: Ø 60 mm, Ø 27 pdg with ball joint or Ø 34 pdg with ball joint.

Bracket outreach: 0.50m



CEANO GM

Light fixing: Ø 60 mm.

Bracket outreach: 1 m.

Pole: Concerto cylindrical-conical steel Ø 62 mm

CEANO

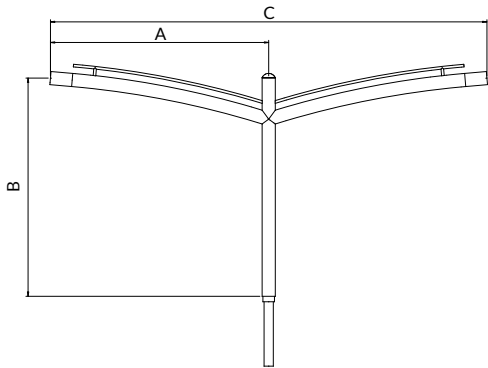

CEANO	A mm	B mm	C mm	D mm	Tilt	Weight Kg	SCx m ²
Single light	1000	635	/	5°	8.8	0.13
Twin light	1000	635	2000	/	5°	12.5	0.21

CEANO BRACKETS

CONFIGURATION EXAMPLES



CEANO



Bracket **CEANO PM**


Light:
INDICE CONIC
Height: 5m



Bracket **CEANO GM**

Light:
INDICE
Height: 6m

Design: GHM

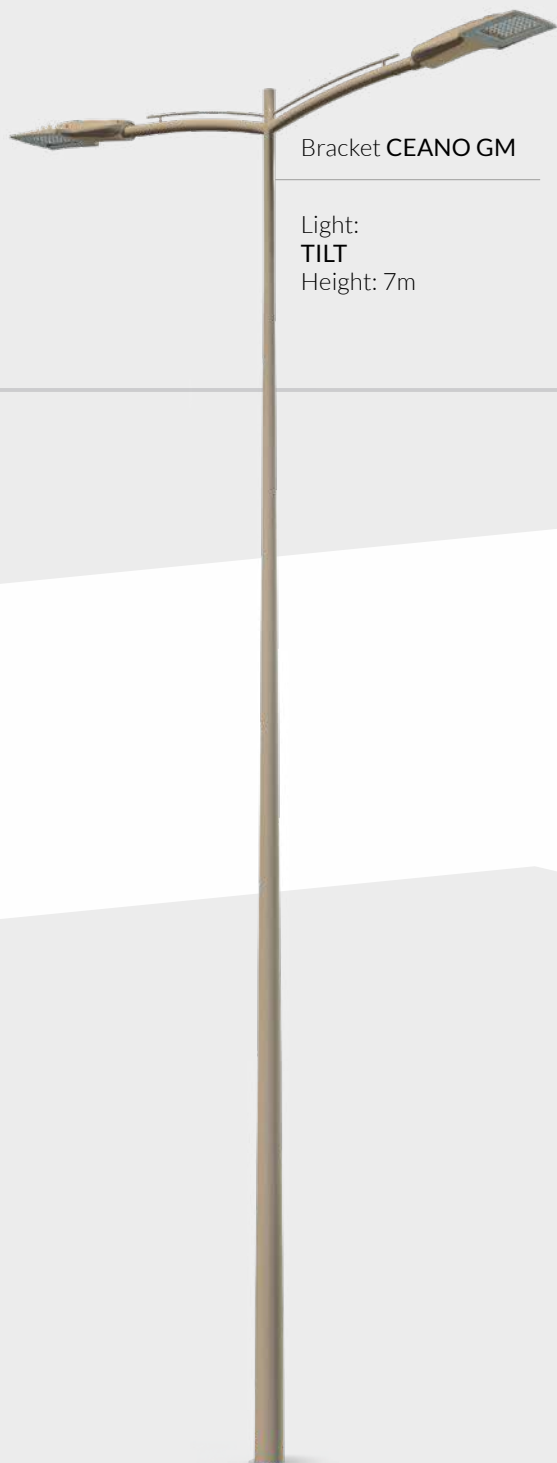

Bracket **CEANO GM**

Light:
TILT
Height: 7m



Bracket **CEANO GM**

Light:
TWEET
Height: 6.40m
Basement:
SOLYA

CEANO