

CELLA


CE

IEC
EN 60598

220-240 V 50 Hz

IP66


RoHS

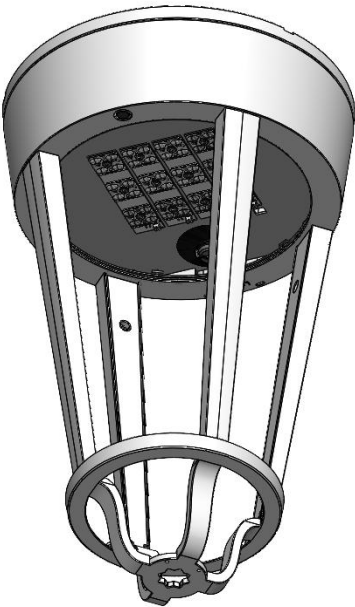


		IK	kg	SCx
Mounted:	PHC with smooth bore	10	10.3 kg	0.2 m²
	PHC top 60	10	10.7 kg	0.2 m²
	VPC with smooth hole	10	9.8 kg	0.11 m²
	VPC Top 60	10	10.3 kg	0.11 m²
Suspended:	PHC with arm and without swivel	10	9.9 kg	0.2 m²
	PHC with arm and swivel	10	10.6 kg	0.2 m²
	VPC without arm or swivel base	10	8.7 kg	0.06 m²
	VPC with arm and without base	10	9.4 kg	0.11 m²
	VPC with arm and swivel	10	10.2 kg	0.11 m²

PHC: High-clarity polycarbonate
VPC: Clear flat glass

Worn

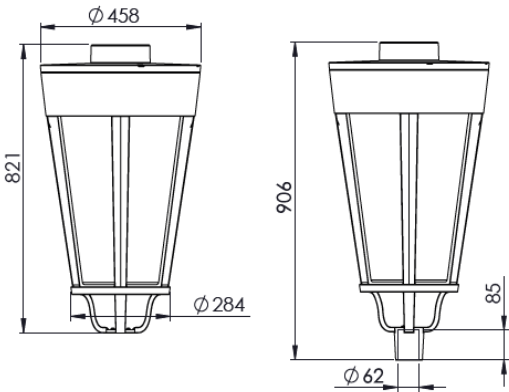


Suspended

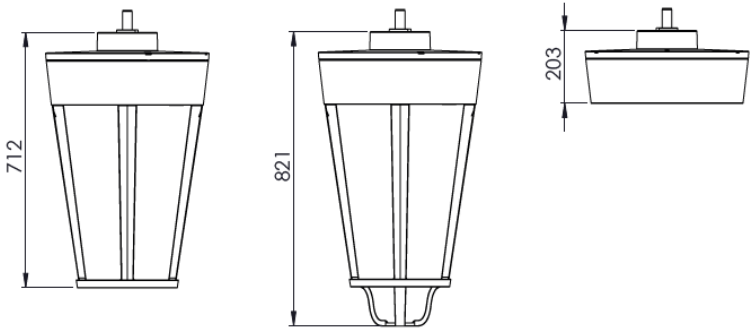


The light source contained in this luminaire must only be replaced by the manufacturer or its authorised service agent or a person with equivalent qualifications.

Range

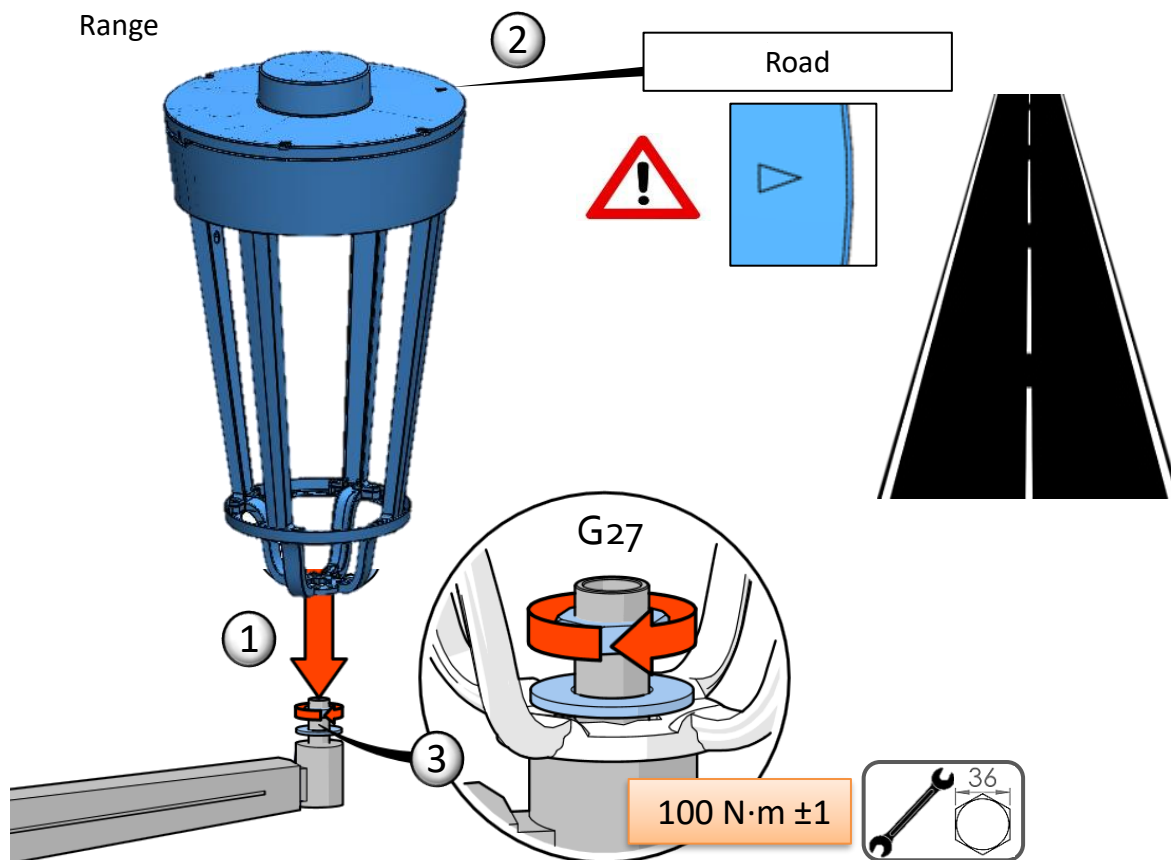


Top 60



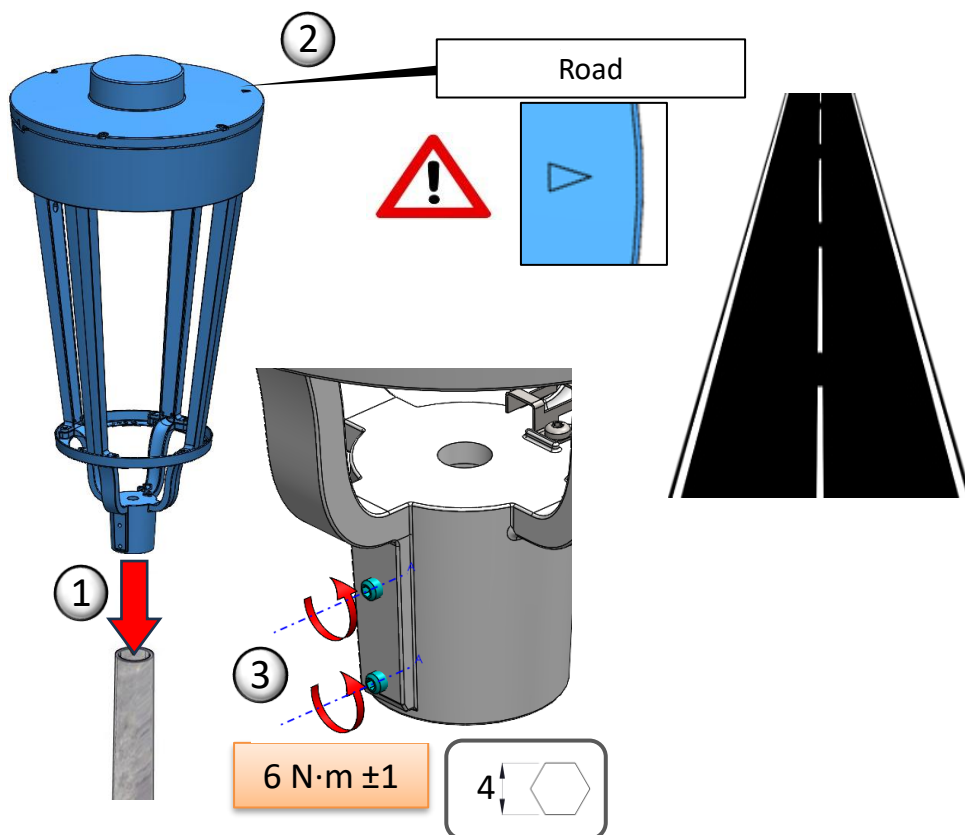


The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person of equivalent qualification.





Suspended

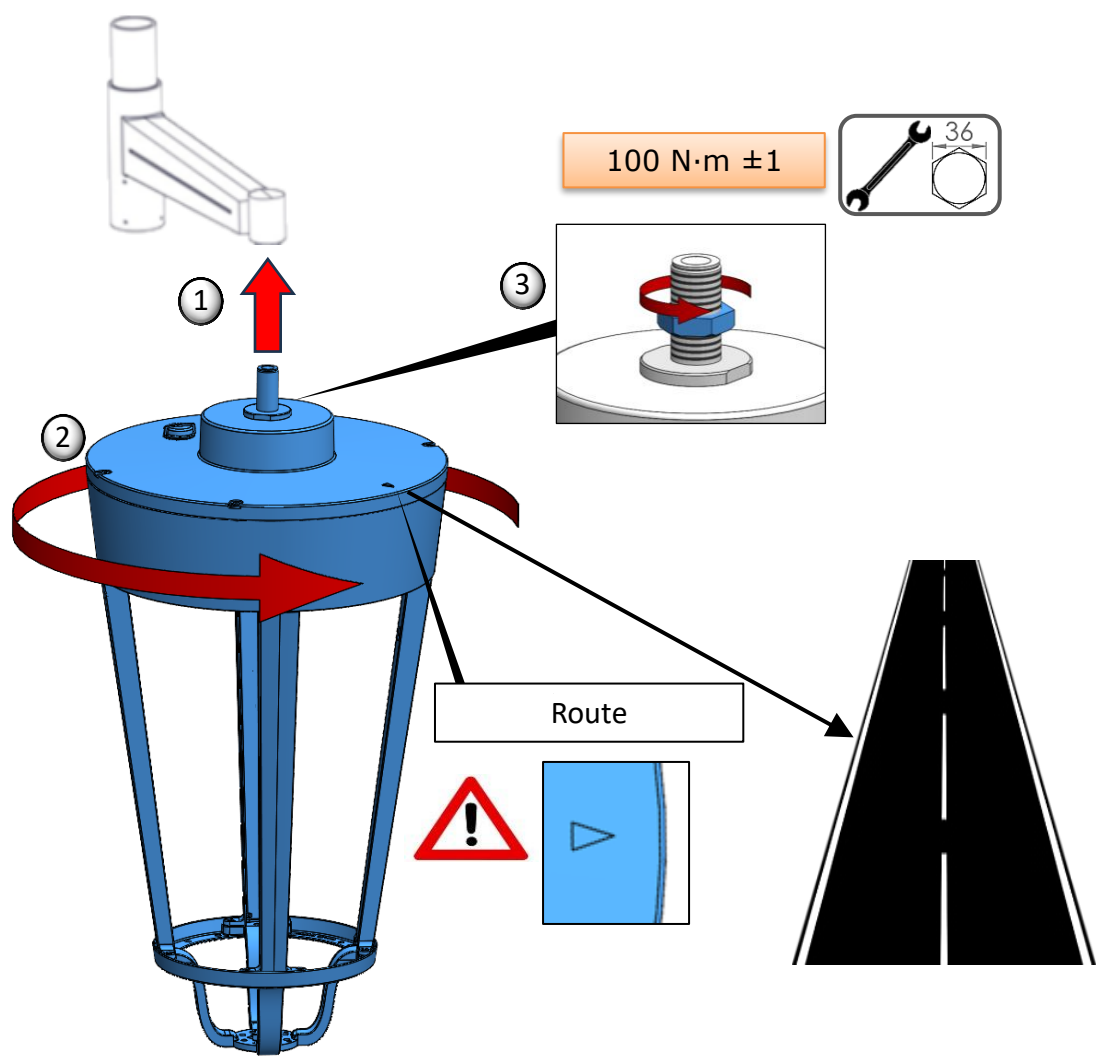

The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person with equivalent qualifications.

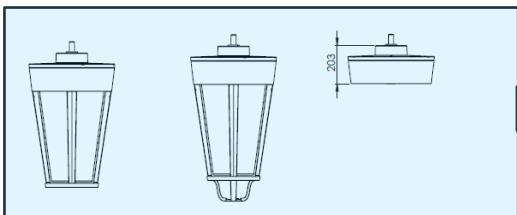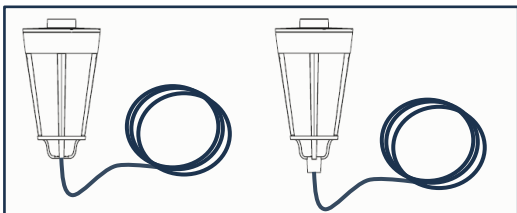

4 N·m ±0.5

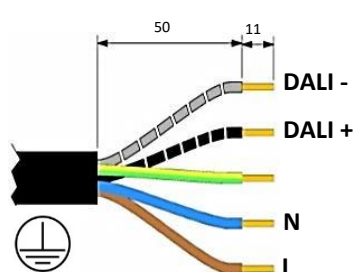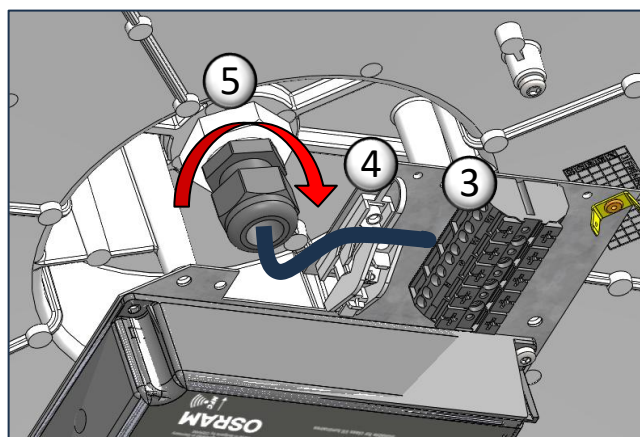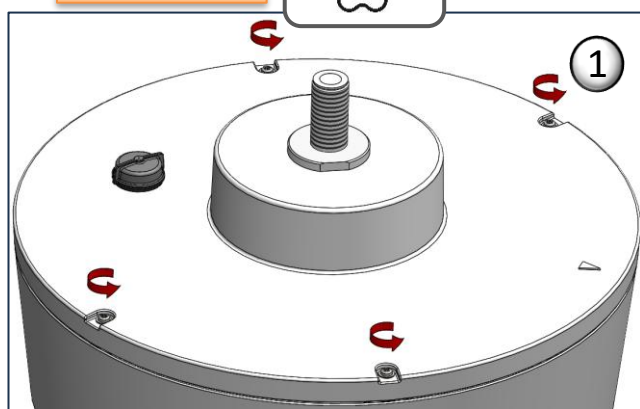

The DALI wires at the base of the pole must be separated and insulated if they are not connected.

The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person with equivalent qualifications.