


**Head bracket** : aluminium, Ø 60 mm  
Lateral mounting of the light using a ball-and-socket joint  
Styling fixing of the bracket on the pole  
**Finish**: polyester powder coating, any colour available  
**Pole**: cylindrical-conical steel Ø 60/62 mm

HEAD

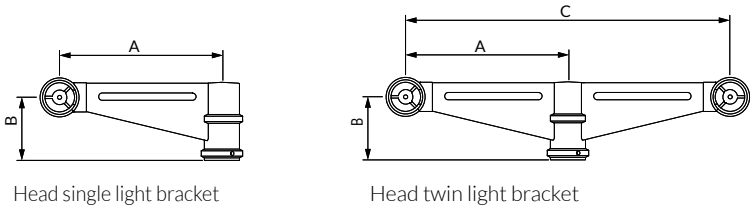

HEAD	A mm	B mm	C mm	D mm	Tilt	Weight Kg	SCx m²
Single light	300	130	-	-	4°	7	0.04
Twin light	300	130	600	-	7°	11	0.07

## HEAD BRACKETS CONFIGURATION EXAMPLES




HEAD



Chorus Head



Indice Head

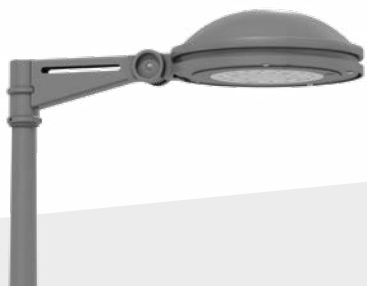

Elipt Head



Tsana Head



Metro Head

## HEAD

