

# MOANA

## SPECIFICATIONS



PRODUCT NAME	MOANA
HOUSING	Die-cast aluminium body Built-in control gear mounted on a removable plate that can be disconnected without tools
BOWL	Thermally tempered and screen printed flat glass
FINISH	Polyester powder coating, any colour available
SOURCES	BLS strips
COLOUR TEMPERATURE	Amber*, 2200 K, 2400 K, 2700 K, 3000K, 4000 K
OPTICAL	QUADRALENS
FLUX & POWER**	Up to 13 960lm; 101W
ELECTRICAL CLASS	Class I or II
MOUNTING	Post top, lateral



\*Approx. 1800K

\*\*At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)



- ▶ Smart-ready® (Zd4i)
- ▶ Dimming
- ▶ Detection
- ▶ Moonlight technology
- ▶ Tunable white options
- ▶ WIZARD management system (pag. 420)

## MECHANICAL INTERFACES

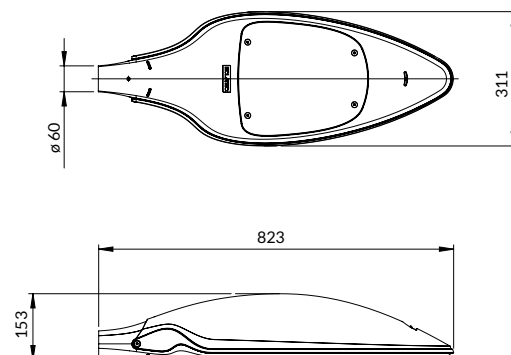



#### Configuration

Curved column  
Light tip  
Column height: 7m

#### Configuration

Bracket **LIZEA**  
Outreach 1500 mm  
Counter-light **PICO**  
Outreach 100 mm  
Column height: 6m

#### Configuration

End piece **REVA**  
Column height: 4m

#### Configuration

Bracket **KC**  
Outreach 800 mm  
Column height: 5m

## MOANA