


PARIS I

PARIS II

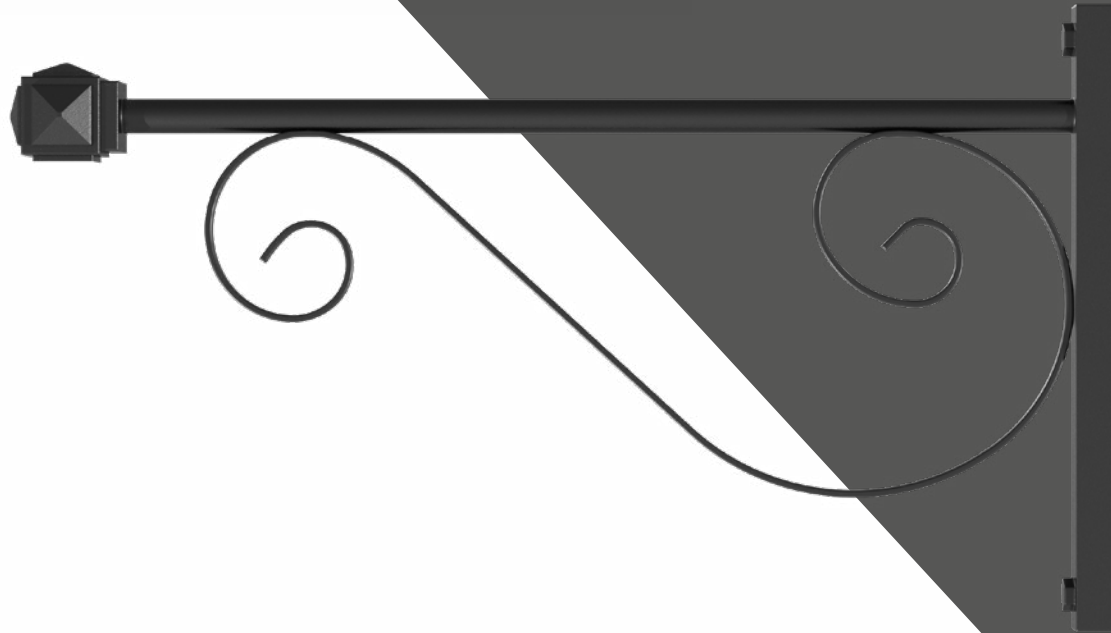

PARIS I

Material electro-zinc plated steel
Suspended assembly

Suspended light fixings: Ø 27 pdg
or Ø 34 pdg

Plate fixing: 2 Ø 16 mm holes, 450 mm apart
for 075 m ridge, 560 mm apart for 1 m ridge



PARIS II

Material: electro-zinc plated steel Versions:
Tubular (standard) or square
Supported or suspended assembly


Supported light fixings: Ø 27 pdg, Ø 34 pdg
or 60 mm

Suspended light fixings: Ø 27 pdg or Ø 34 pdg


Plate fixing: 2 Ø 16 mm holes, 280 mm apart
for 045 m ridge, 400 mm apart for 075 m
and 1 m ridge



PARIS II



PARIS I	A mm	B mm	C mm
Wall bracket	750	/	/
Wall bracket	1000	/	/



PARIS II	A mm	B mm	C mm
Wall bracket	450	/	/
Wall bracket	750	/	/
Wall bracket	1000	/	/