



Galvanised steel bracket.
Option: cable puller.

STANZA R

Light fixings: Ø 60 mm lg 100 mm or
threading Ø 27 pdg or threading Ø 34 pdg

Bracket outreach:

0.7 m suspended and 0.9 m lateral.

1 m suspended and 1.20 m lateral.

Bracket STANZA R

Galvanised steel wall brackets

Fixing: for Ø 12 mm anchors on vertical spacing
of 425 mm.

Bracket outreach:

0.7 m suspended and 0.9 m lateral.


1 m suspended, 1.20 m lateral.

Light fixings: Ø 60 mm


lg 100 mm or threading Ø 27 pdg.

Pole: Concerto cylindrical-conical steel Ø 62 mm


STANZA R

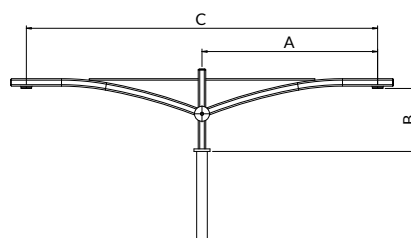

twin light bracket



single light bracket



wall bracket

STANZA R	A mm	B mm	C mm	D mm	Tilt	Weight Kg	SCx m ²
Single suspended light	700	900	-	-	5°	14.1	0.21
	1000	900	-	-	5°	16.3	0.24
Single lateral light	900	1000	-	-	5°	13.8	0.20
	1200	1000	-	-	5°	15.9	0.23
Dual suspended light	700	900	1400	-	5°	19.1	0.29
	1000	900	2000	-	5°	22.9	0.35
Dual lateral light	900	1000	1800	-	5°	18.3	0.27
	1200	1000	2400	-	5°	22.0	0.33
Suspended wall bracket	700	0	-	300	5°	-	-
	1000	0	-	300	5°	-	-
Lateral wall bracket	900	75	-	225	5°	5.0	-
	1200	75	-	225	5°	-	-