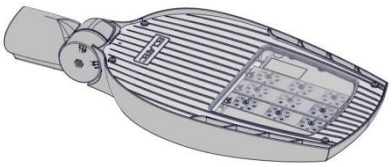
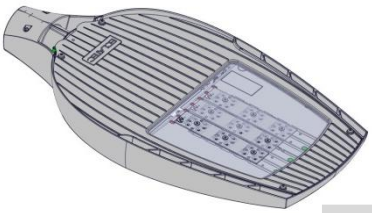
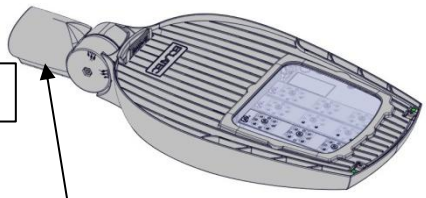
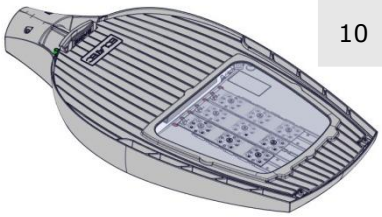
# STELIUM /TWEET NEO


IEC EN 60598 | IP66 | OR | RoHS

220–240 V 50 Hz


| | STELIUM | TWEET NEO |
|---|---|---|
| "S" |  |  |
| "X" |  |  |

| IK | kg | SCx | Hmax |
|---|---|---|---|
| 10 | S1:4.8kg<br>S2:6.6kg | 0.05 m² | 12 m |
| 10 | X1:5.8kg<br>X2:7.8kg | 0.06 m² | 12m |


## Ø48–54

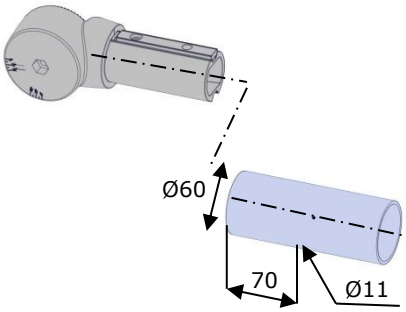




## Ø60

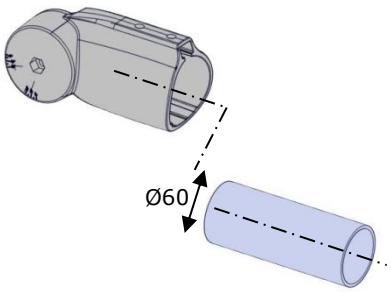


## Ø76

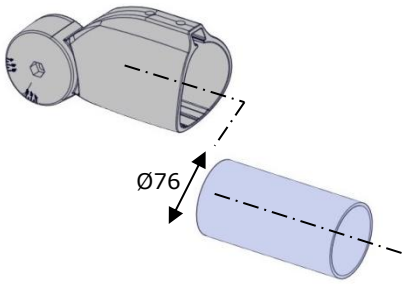

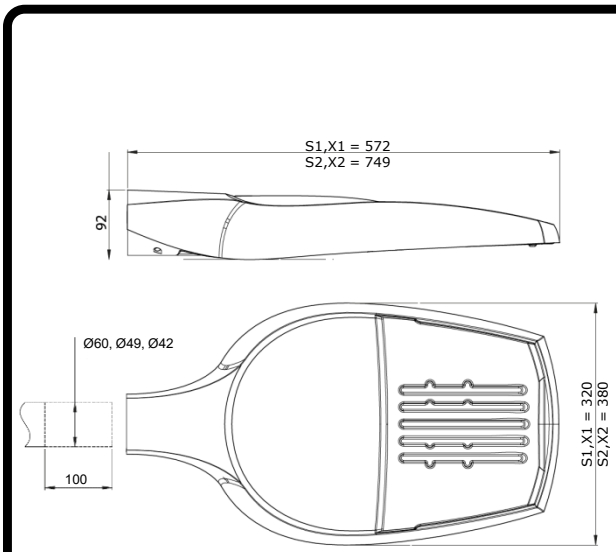

The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person with equivalent qualifications.

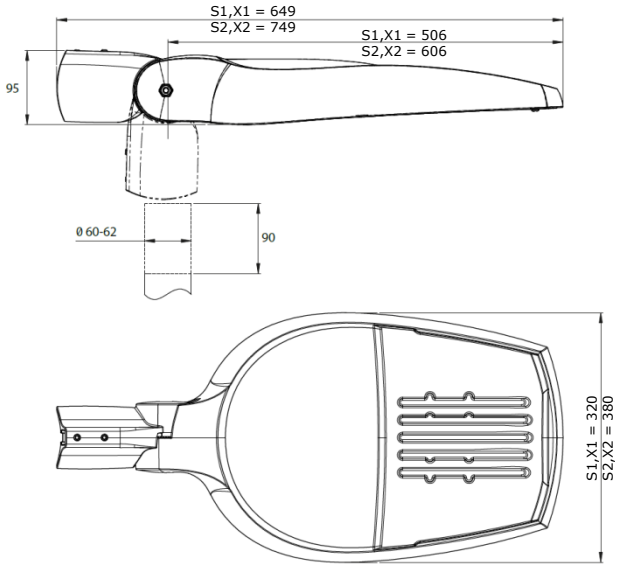
ECLATEC S.A.S. 41, rue Lafayette - CS 20069 - Maxéville - 54528 LAXOU CEDEX - France - Tel. • + 33 (0)3 83 39 38 00
Website • www.eclatec.com

**A**

**STELIUM 'S'**


**TWEET NEO 'S'**

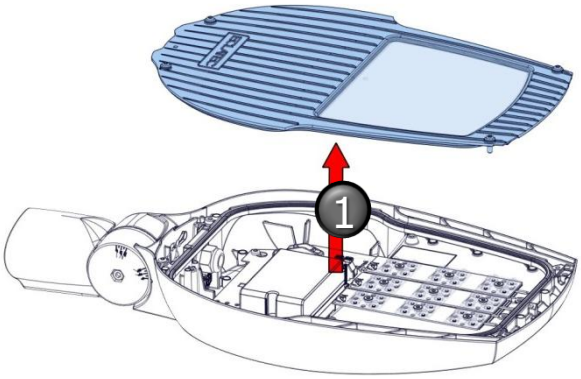


**A'**

**STELIUM 'X'**


**TWEET NEO 'X'**

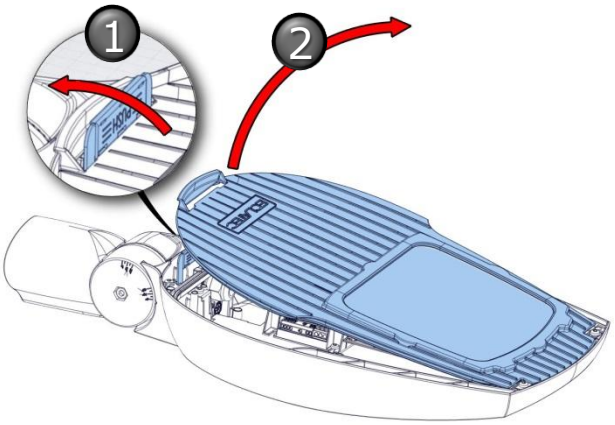



**B**

**STELIUM 'S'**

**TWEET NEO "S"**

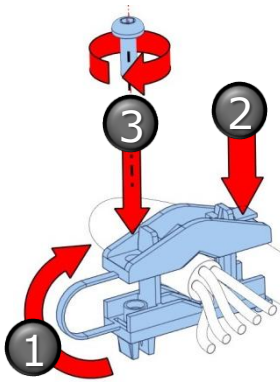



The DALI wires at the base of the pole must be separated and insulated if they are not connected

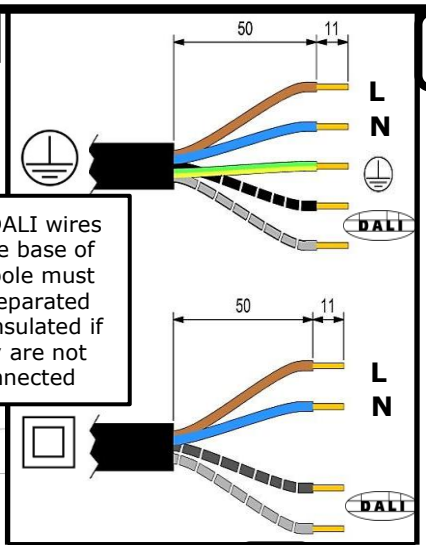



**B'**

**STELIUM "X"**


**TWEET NEO 'X'**

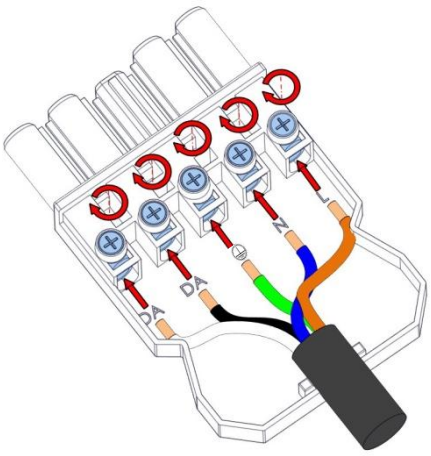

**C**

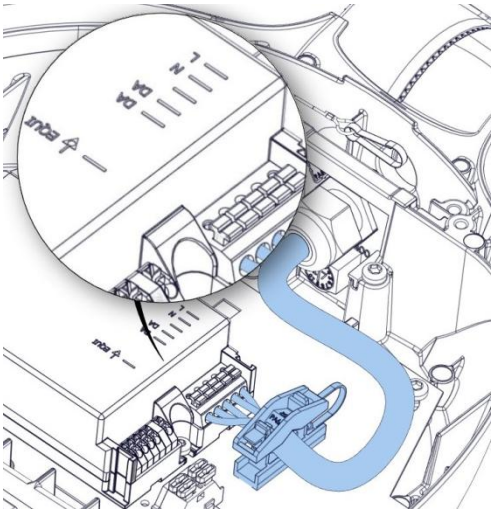

**C'**

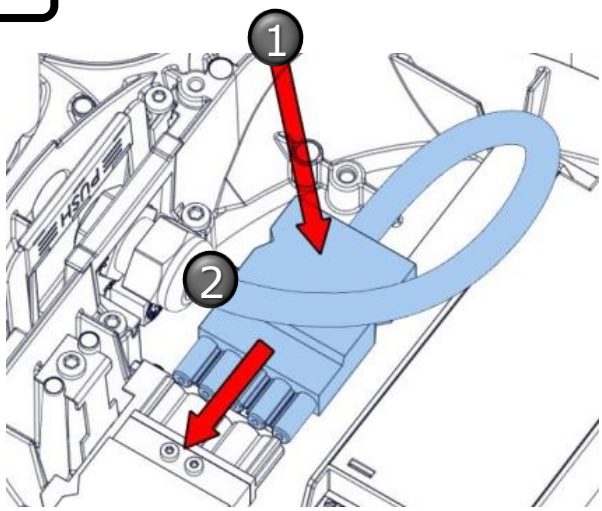


The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person with equivalent qualifications.




ECLATEC S.A.S. 41, rue Lafayette - CS 20069 - Maxéville - 54528 LAXOU CEDEX - France - Tel. • + 33 (0)3 83 39 38 00
Website • www.eclatec.com

**D**

**STELIUM 'S'**


**TWEET NEO 'S'**

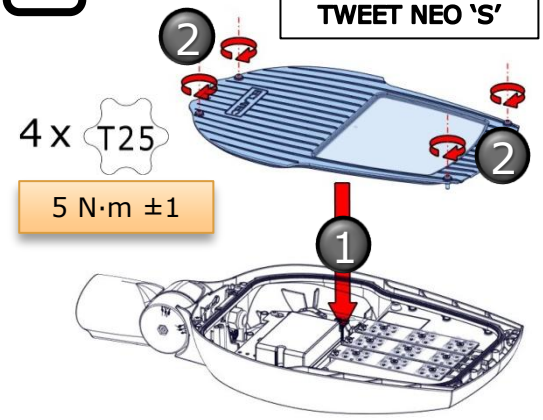


**D'**

**STELIUM 'X'**


**TWEET NEO "X"**

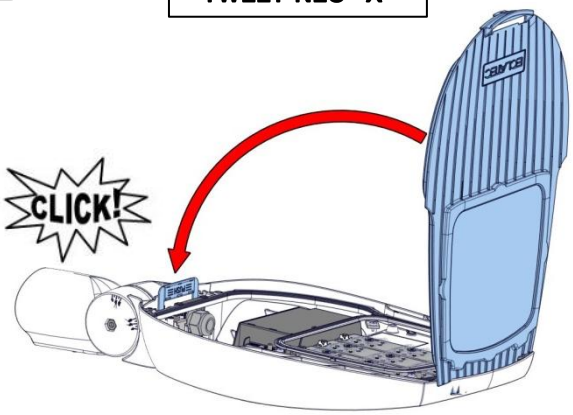





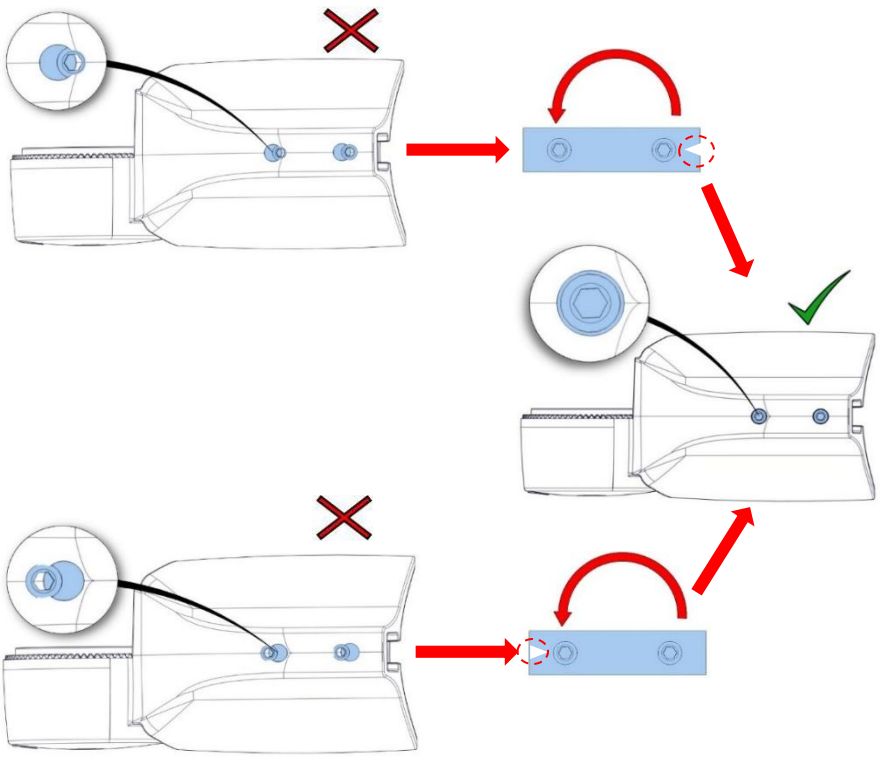


The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person with equivalent qualifications.





ECLATEC S.A.S. 41, rue Lafayette - CS 20069 - Maxéville - 54528 LAXOU CEDEX - France - Tel. • + 33 (0)3 83 39 38 00
Website • www.eclatec.com

**E**

| Ø60 |
| --- |
| Ø76 |

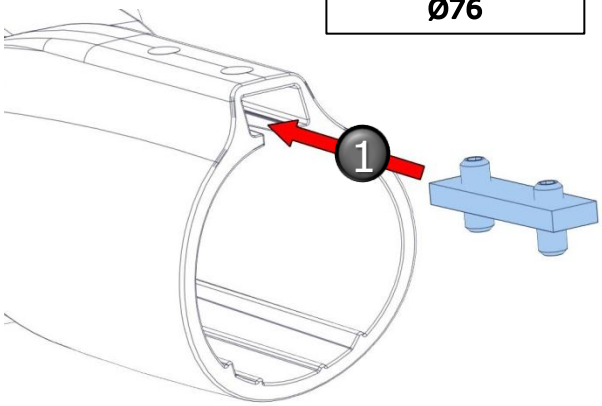

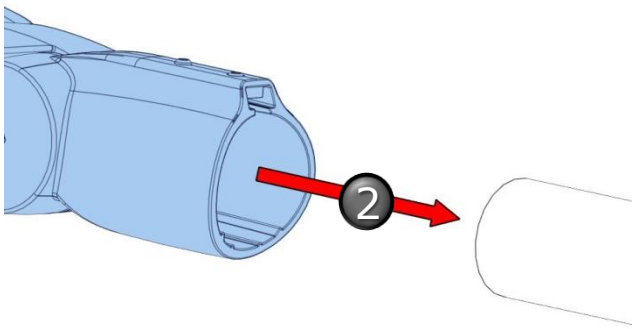
4

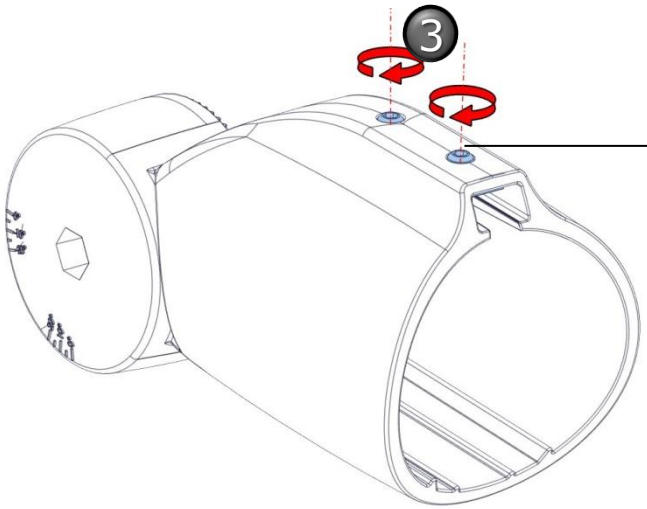2x


2x T25


10 N·m ±1

*M8x25->Ø60*
*M8x40->Ø49*

**F**

**STELIUM 'S' & 'X'**

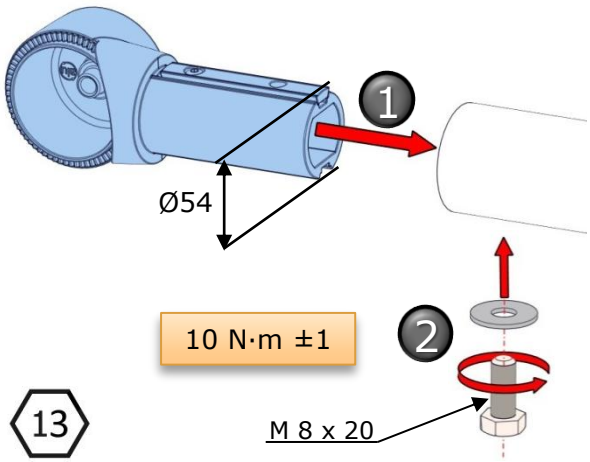

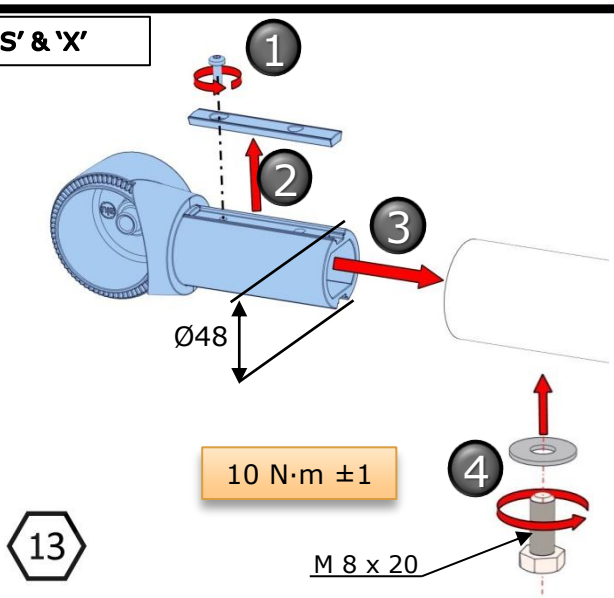
The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person with equivalent qualifications.



ECLATEC S.A.S. 41, rue Lafayette - CS 20069 - Maxéville - 54528 LAXOU CEDEX - France - Tel. • + 33 (0)3 83 39 38 00
Website • www.eclatec.com


**G**

| Ø48–54 |
| --- |
| Ø60 |
| Ø76 |

1x 



12 N·m ±1



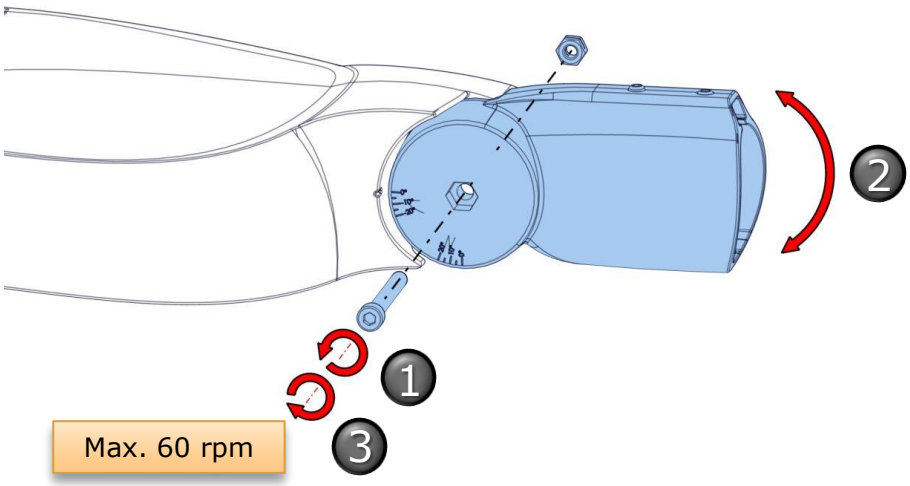
Max. 60 rpm

**H**

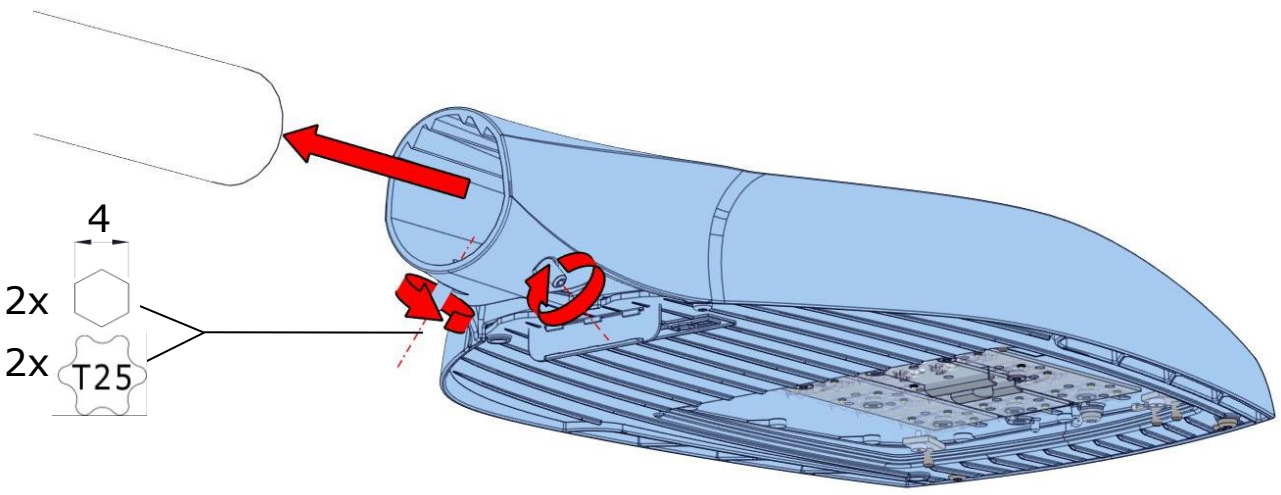


8 N·m ±1


*M8x25->Ø60*
*M8x45->Ø49*


The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person with equivalent qualifications.


ECLATEC S.A.S. 41, rue Lafayette - CS 20069 - Maxéville - 54528 LAXOU CEDEX - France - Tel. • + 33 (0)3 83 39 38 00
Website • www.eclatec.com

I


## Adapter ø42

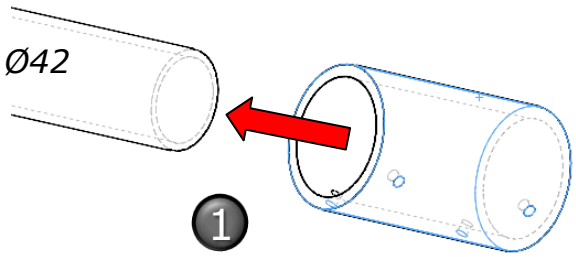

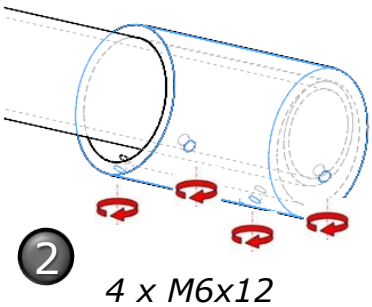
*4 x M6x12*

6 N·m ±1

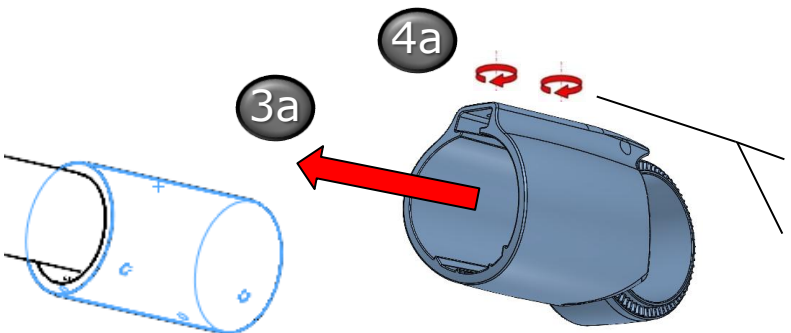



4

2x

2x T25

*M8x25->Ø42*

10 N·m ±1

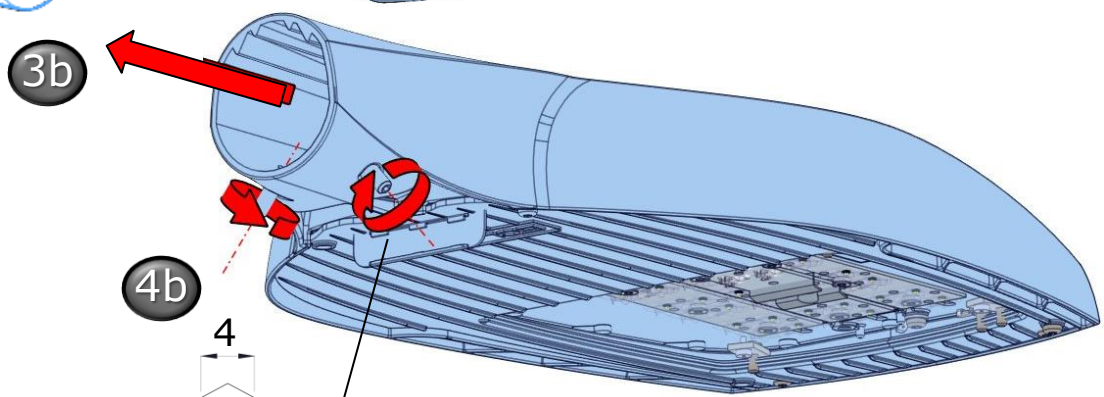


4

*M8x25->Ø42*

2x

2x T25

8 N·m ±1

The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person with equivalent qualifications.



ECLATEC S.A.S. 41, rue Lafayette - CS 20069 - Maxéville - 54528 LAXOU CEDEX - France - Tel. • + 33 (0)3 83 39 38 00
Website • www.eclatec.com