
STELIUM / TWEET NEO
For SUNPOLE C

ECLATEC

IEC EN 60598 | IP66 | RoHS

24 V AC
or 1.4 A DC max (30–60 V)


STELIUM

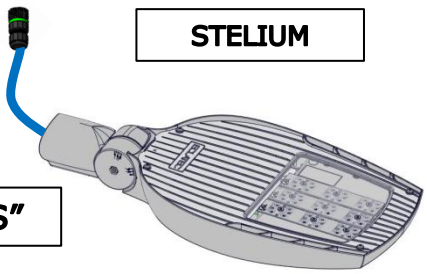

"S"

TWEET NEO



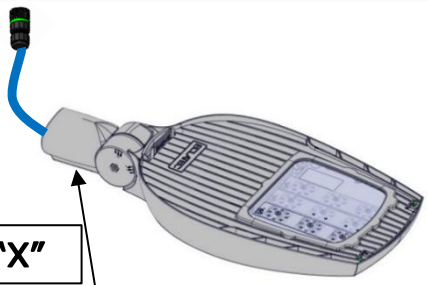


"X"




IK	kg	SCx	Hmax
10	S1: 4.8 kg S2: 6.6 kg	0.05 m²	12 m
10	X1: 5.8 kg X2: 7.8 kg	0.06 m²	12m


Ø48-54

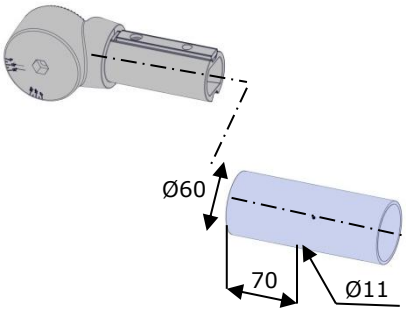



Ø60

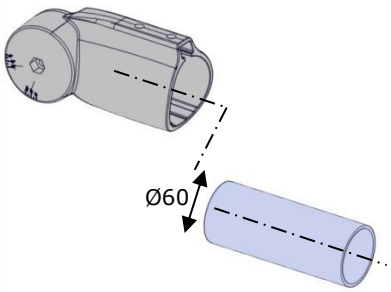

Ø76

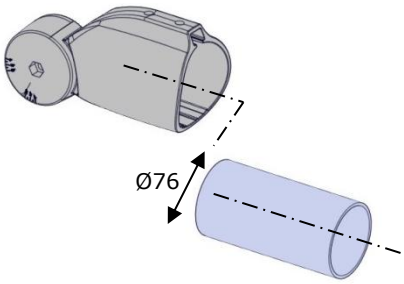

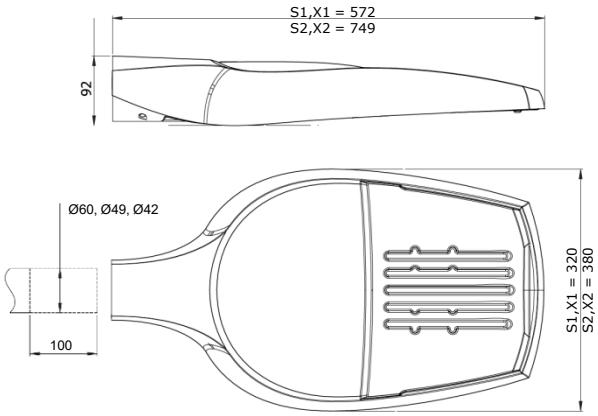


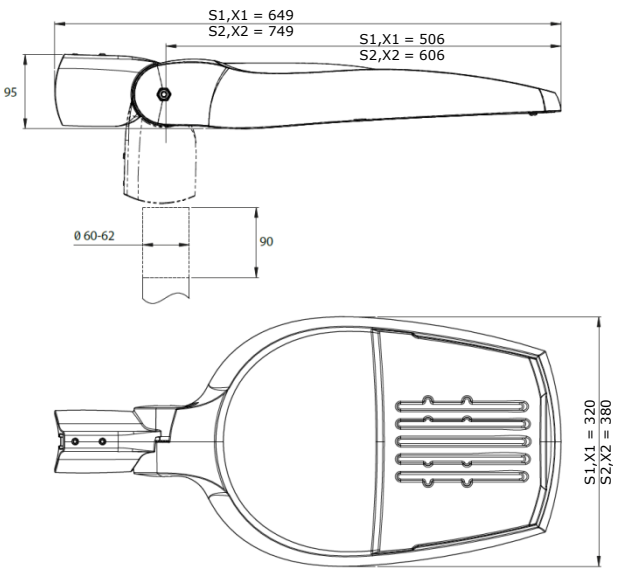

The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person of equivalent qualification.


Connect 24 V-rated luminaires only to 24 V-rated cassettes

A

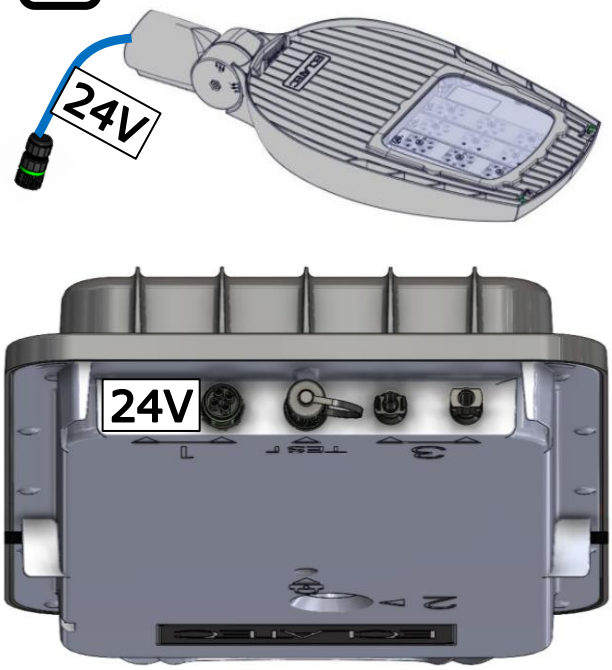

OR


A'

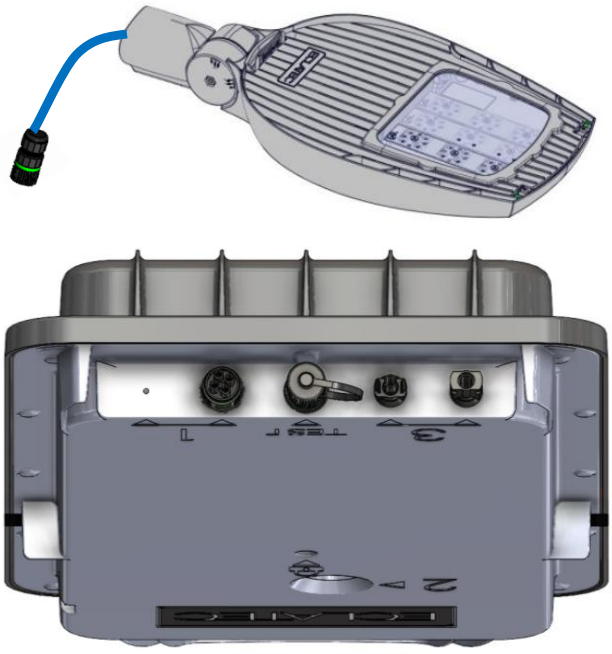

If necessary, open and close the lights


B

STELIUM 'S'
TWEET NEO "S"

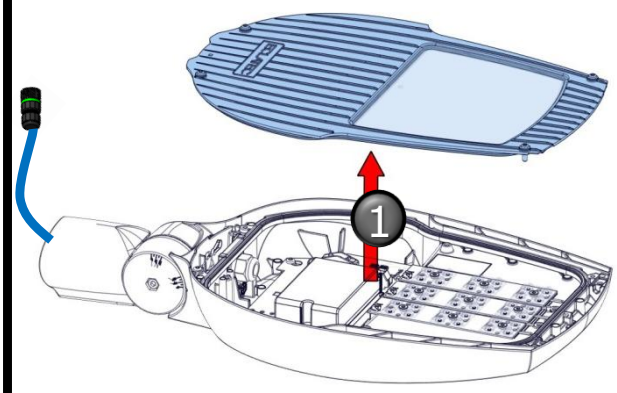

B'

STELIUM 'X'
TWEET NEO "X"

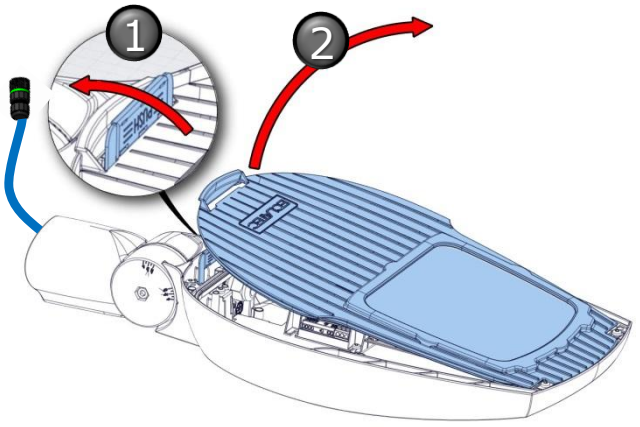


The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person with equivalent qualifications.

D

STELIUM 'S'


TWEET NEO "S"

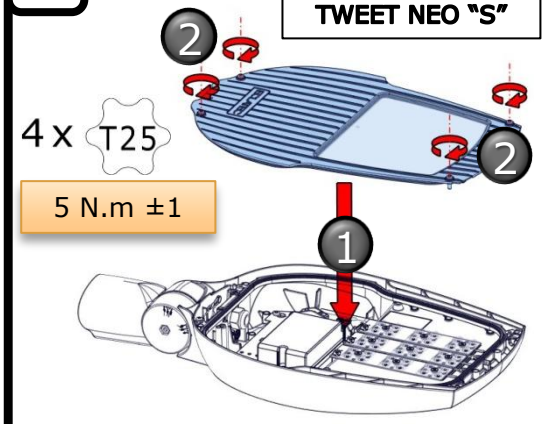


D


STELIUM 'X'

TWEET NEO "X"

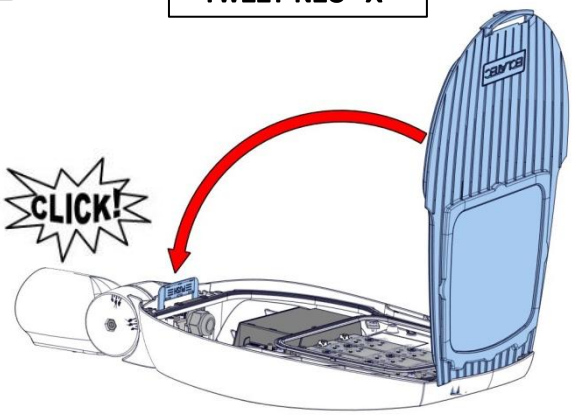






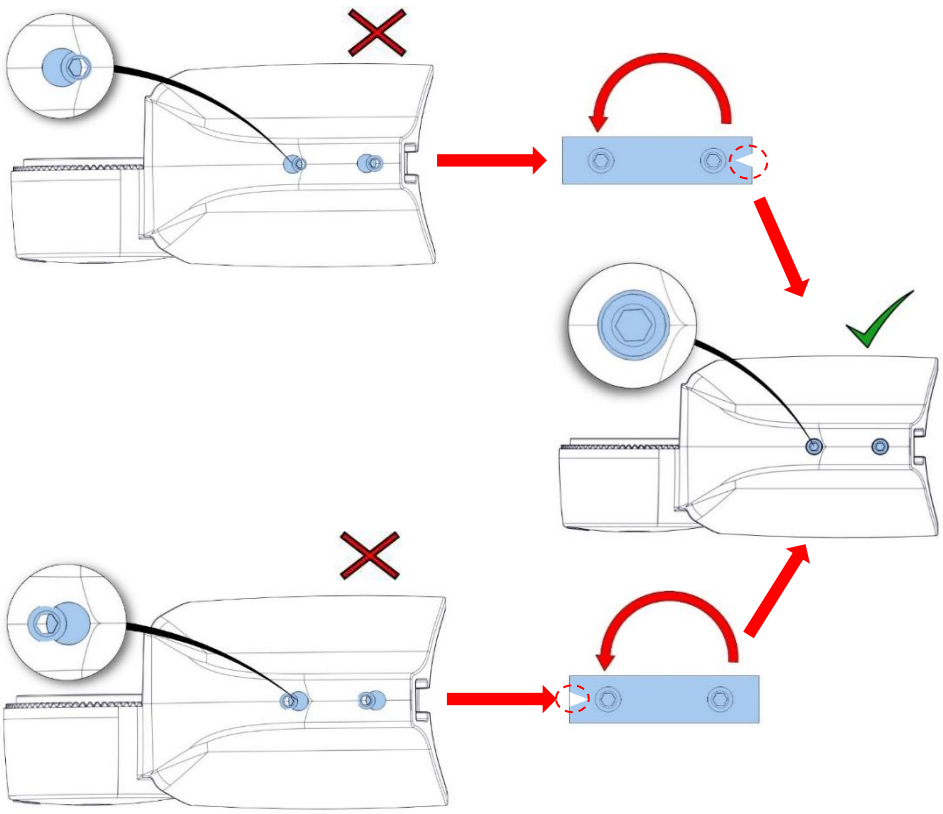



The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person of equivalent qualification.

E

Ø60
Ø76

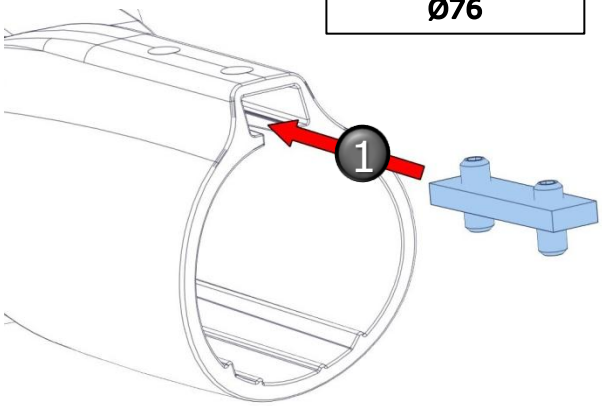

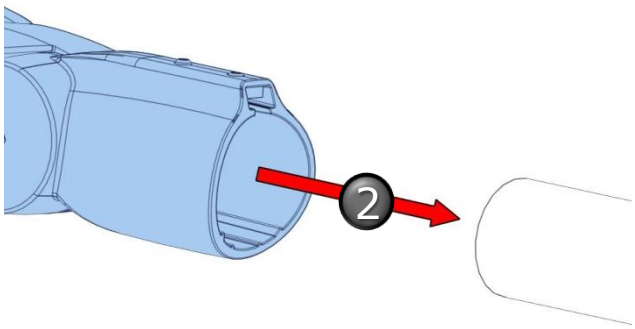

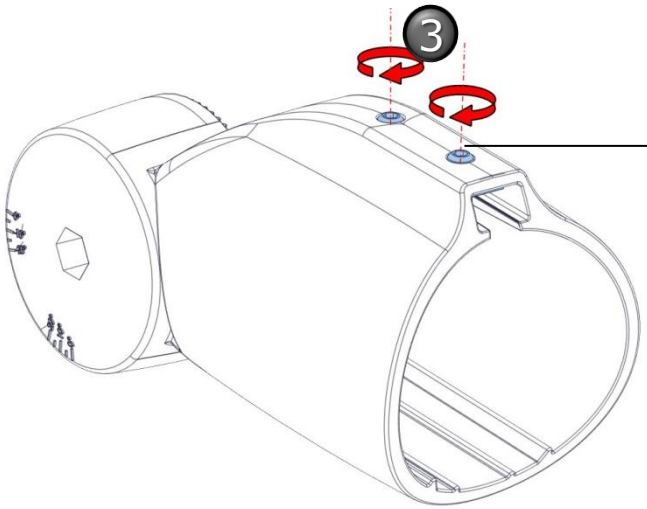

4

2x


2x T25


10 N·m ±1

M8x25->Ø60
M8x40->Ø49-Ø42

F

STELIUM 'S' & 'X'

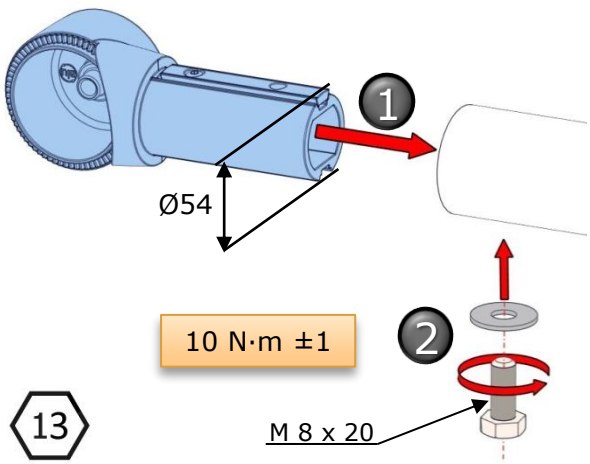

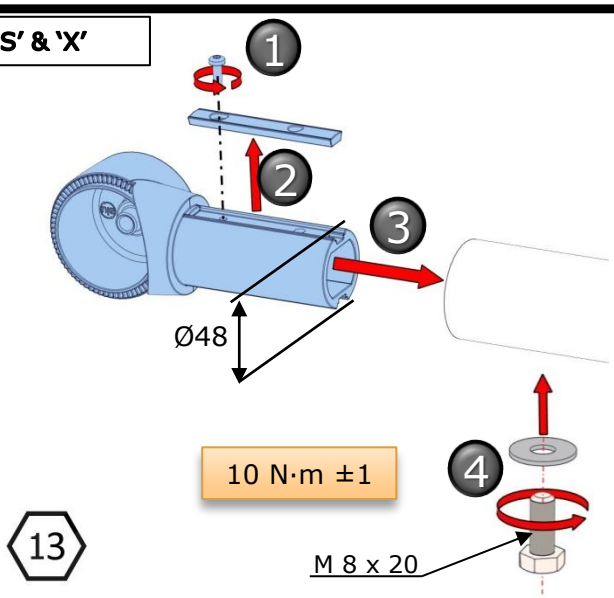


The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person of equivalent qualification.


G

Ø48–54
Ø60
Ø76

1x 


12 N·m ±1



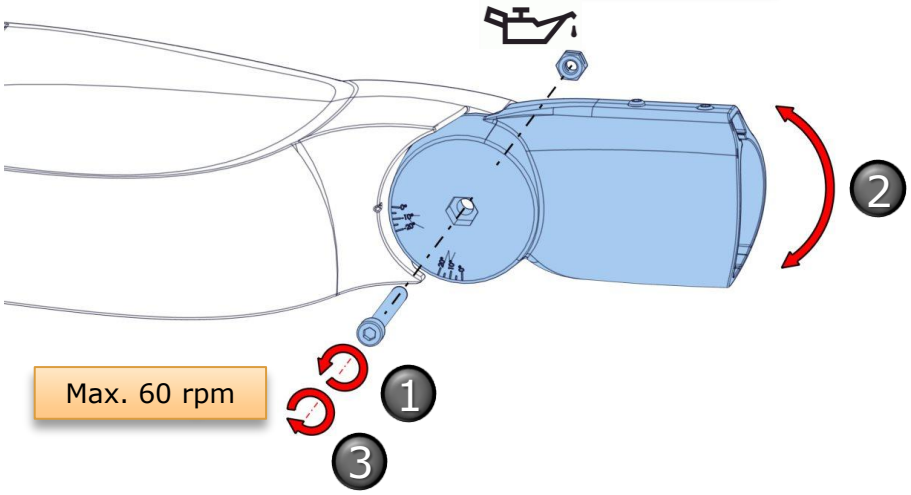

H

TWEET NEO 'S' & 'X'

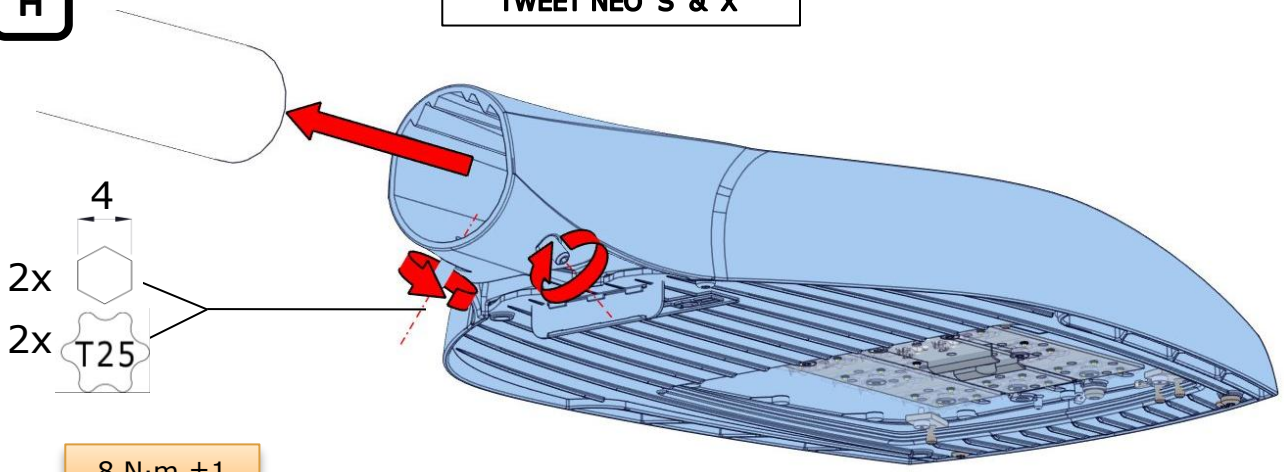

8 N·m ±1

M8x25->Ø60
M8x45->Ø49-Ø42

The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent or a person with equivalent qualifications.