



SPECIFICATIONS

✓RoHS IP66 IK10

PRODUCT NAME	TAÏGA BOLLARD
HOUSING	Lighting head and module in die-cast aluminium Aluminium profile 200 mm tube
BOWL	Polycarbonate
FINISH	Polyester powder coating, any colour available
SOURCES	BLS 8
COLOUR TEMPERATURE	Amber*, 2200 K, 2400 K, 2700 K, 3000K, 4000 K
FLUX & POWER**	Up to 1962lm; 19W
ELECTRICAL CLASS	Class I or II


*Approx. 1800K

**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)

*Approx. 1800K



- ▶ Dimming
- ▶ Detection
- ▶ WIZARD management system (pag. 420)

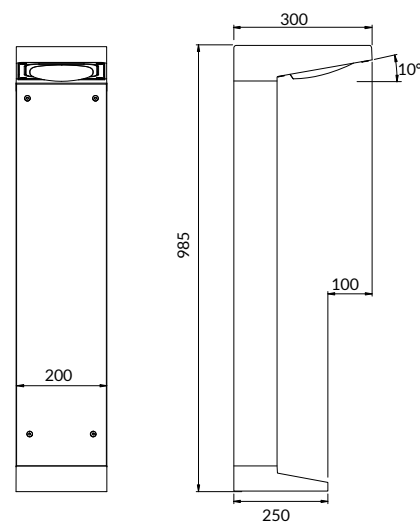

MOUNTING



Cast iron base
Internal fixing using 4 anchor
rods, Ø 12 mm