



ZELDA

SPECIFICATIONS



PRODUCT NAME	ZELDA 1	ZELDA 2	ZELDA 3
HOUSING	Die-cast aluminium body		
BOWL	Thermally tempered flat glass		
FINISH	Polyester powder coating, any colour available		
SOURCES	BLS strips		
COLOUR TEMPERATURE	Amber*, 2200 K, 2400 K, 2700 K, 3000K, 4000 K		
OPTICAL	QUADRALENS		
FLUX & POWER**	Up to 6517lm 51W	Up to 16 597lm 123W	Up to 28 269lm 208W
ELECTRICAL CLASS	Class I or II		
MOUNTING	Post top, lateral		


*Approx. 1800K

**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)



- ▶ Smart-ready® (Zd4i)
- ▶ Dimming
- ▶ Detection
- ▶ Moonlight technology
- ▶ Tunable white options
- ▶ WIZARD management system (pag. 420)


MECHANICAL INTERFACES




POST TOP

LATERAL


ZELDA 1

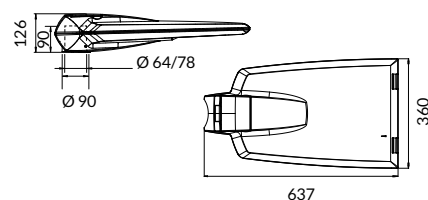

ZELDA 2

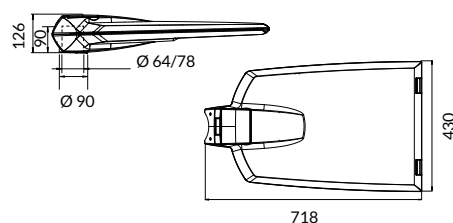

ZELDA 3

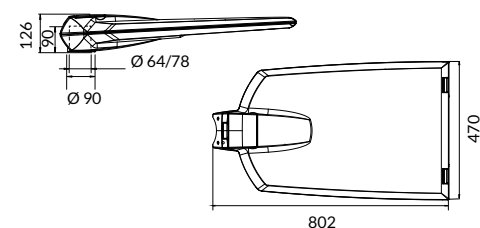



ZELDA 2

Configuration

Bracket **MUSA**
Outreach 1000 mm



ZELDA 2

Configuration

Bracket **PALAMA**
Outreach 1000 mm
Column height:
7m



ZELDA 1

Configuration

GALA column
Column height:
6m



ZELDA 1

Configuration

Column height:
4m

ZELDA

