

ZELDA 1-2

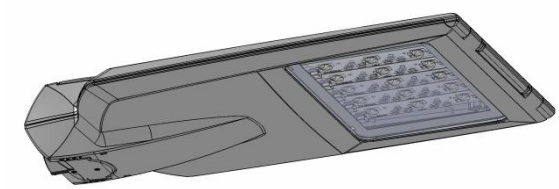


IEC EN 60598 · IP66 · RoHS · 220–240 V 50 Hz

	IK	kg	SCx	Hmax
ZELDA 1	10	7.5kg	0.07 m²	12 m
ZELDA 2	10	10 kg	0.08 m²	14m


ZELDA 1

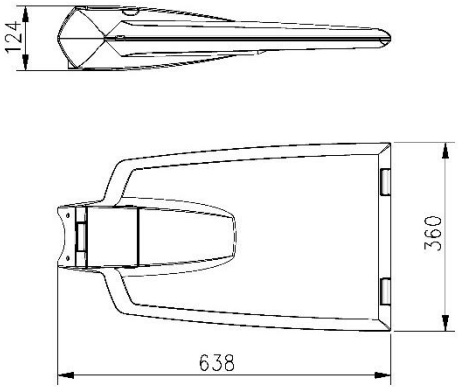


ZELDA 2

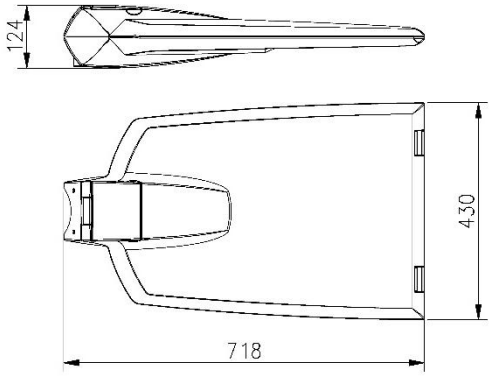


ZELDA 1-2 TOP 60

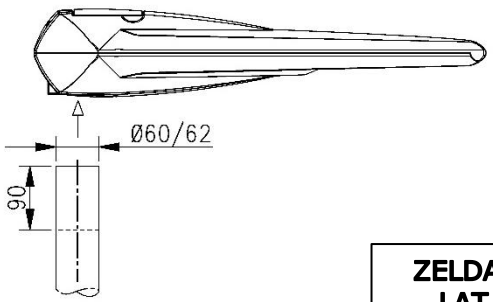


ZELDA 1-2 TOP 76

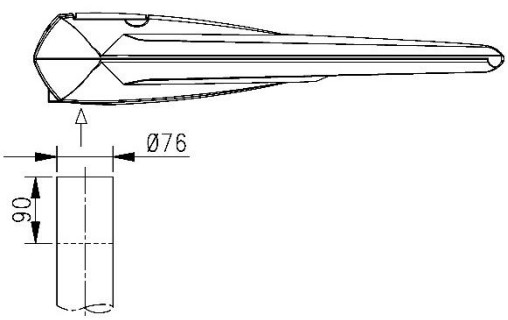


ZELDA 1-2 LAT 60

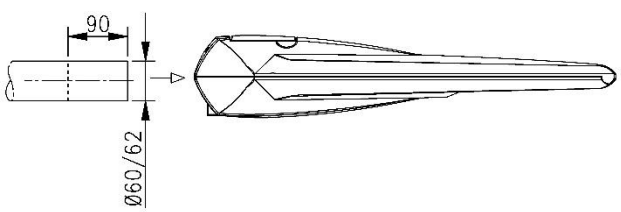

The light source contained in this luminaire must only be replaced by the manufacturer, its authorised service agent or a person with equivalent qualifications.

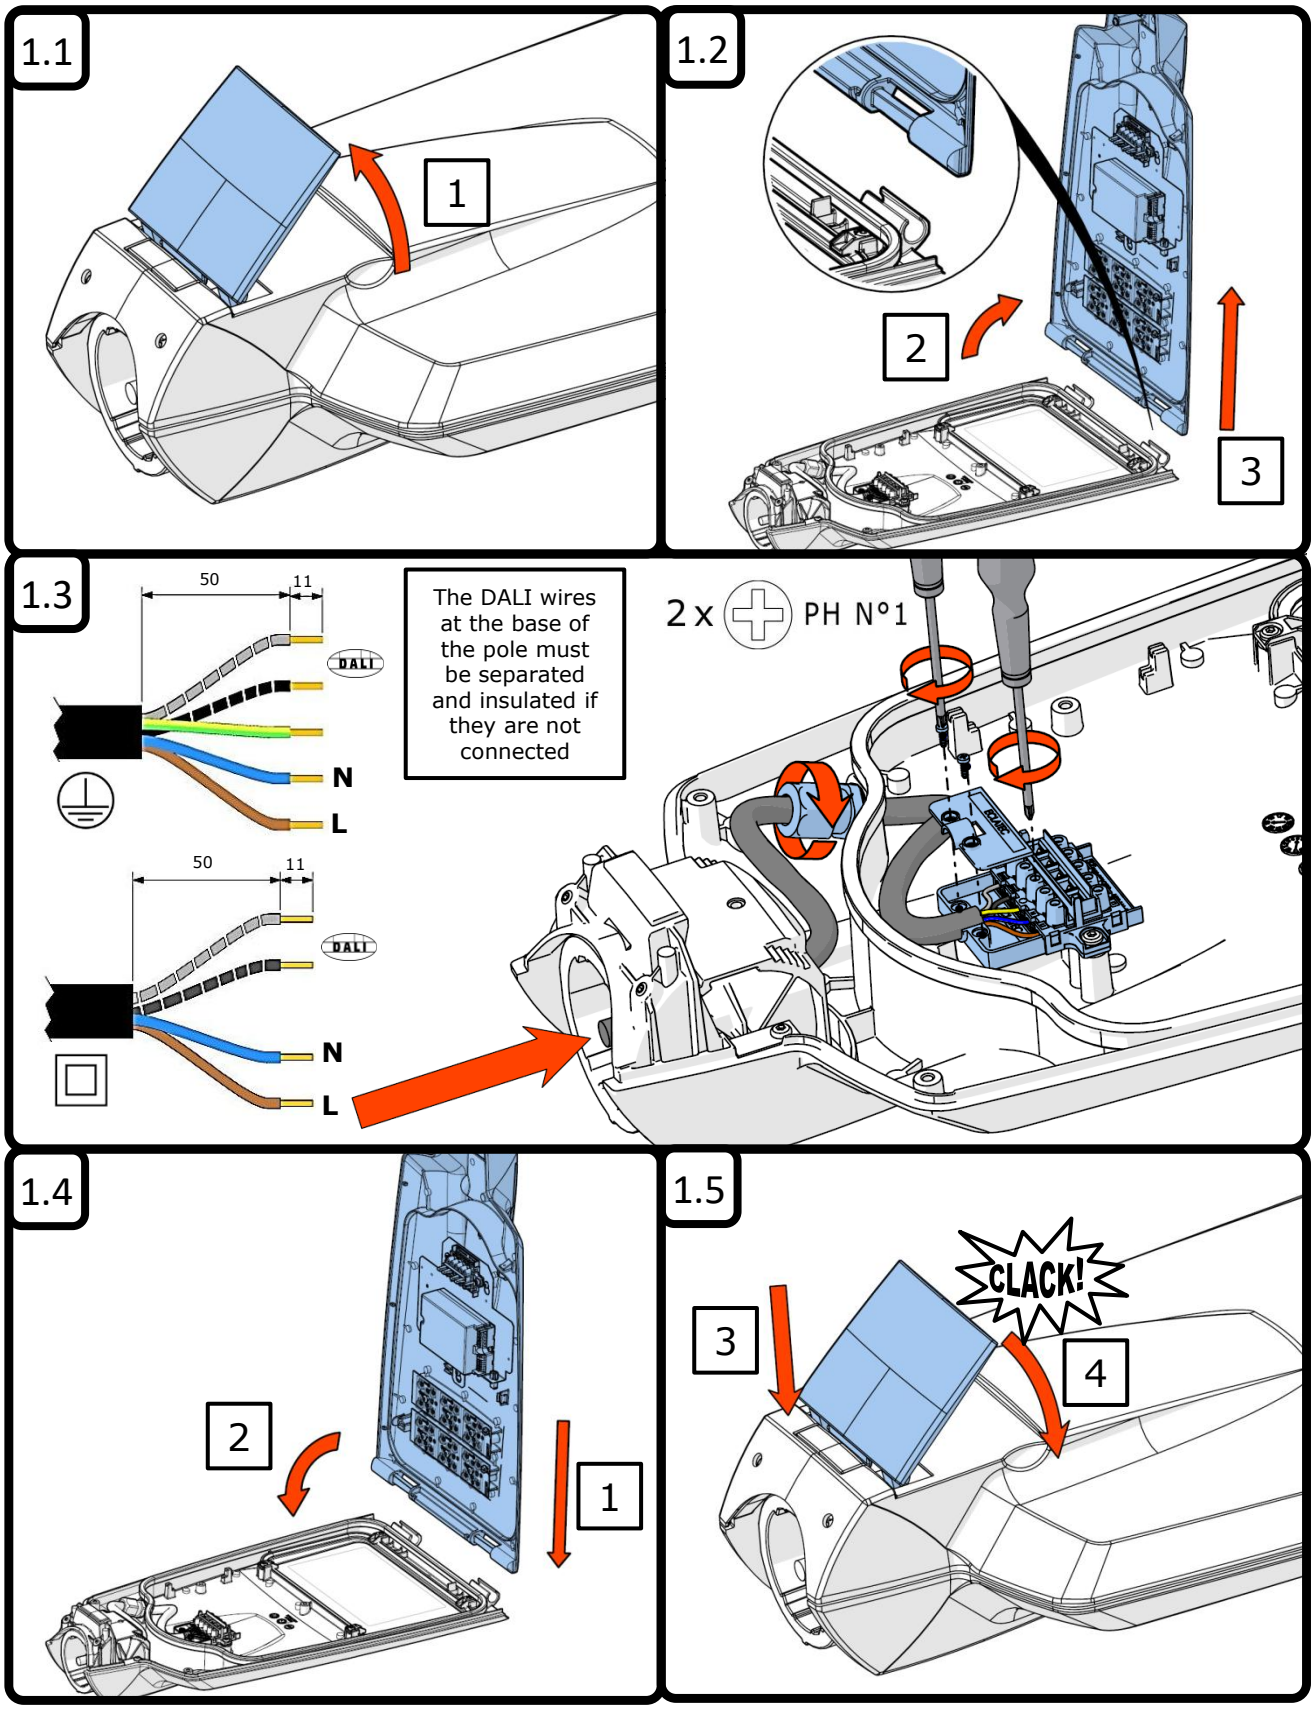


The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent, or by a person with equivalent qualifications.

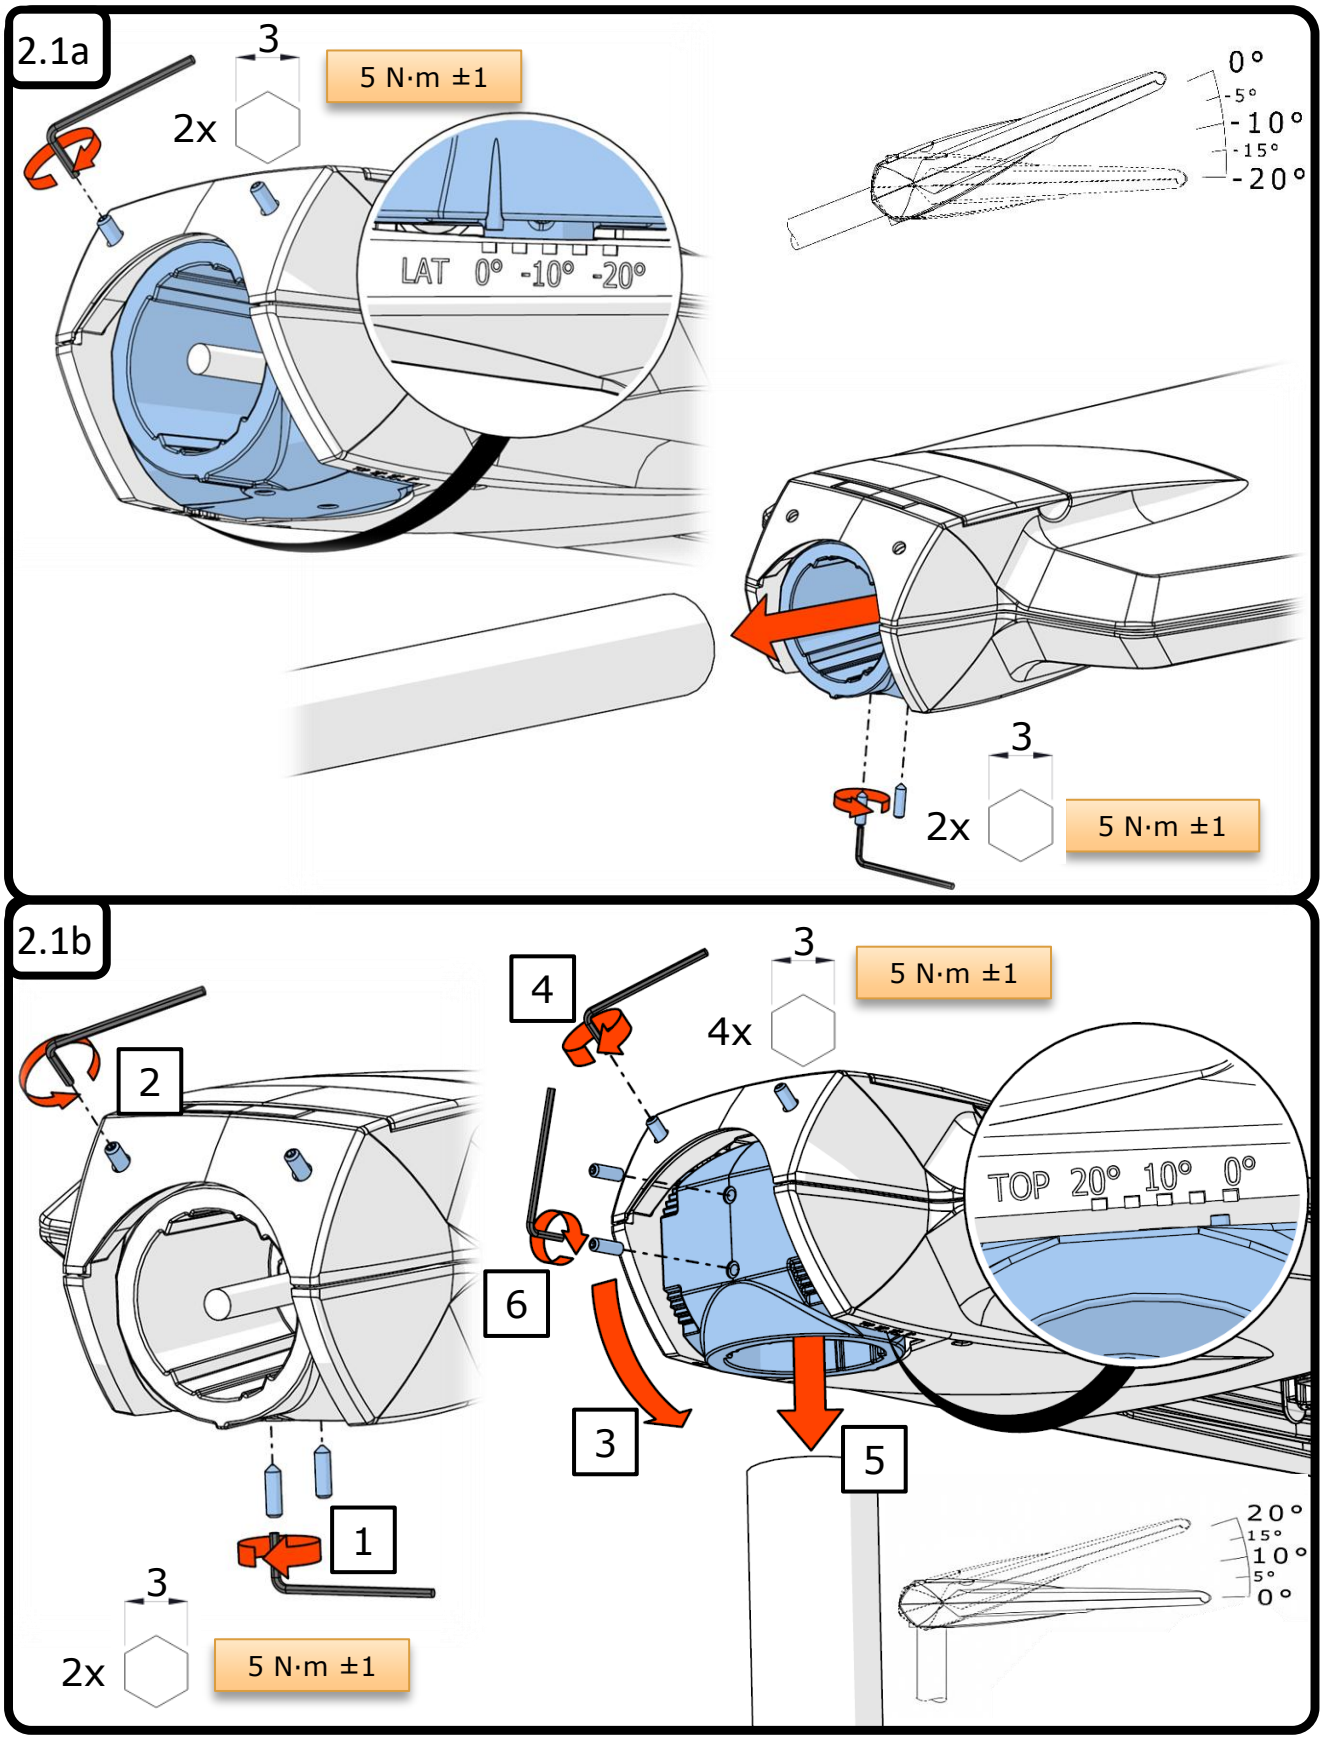


The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent, or by a person with equivalent qualifications.

3

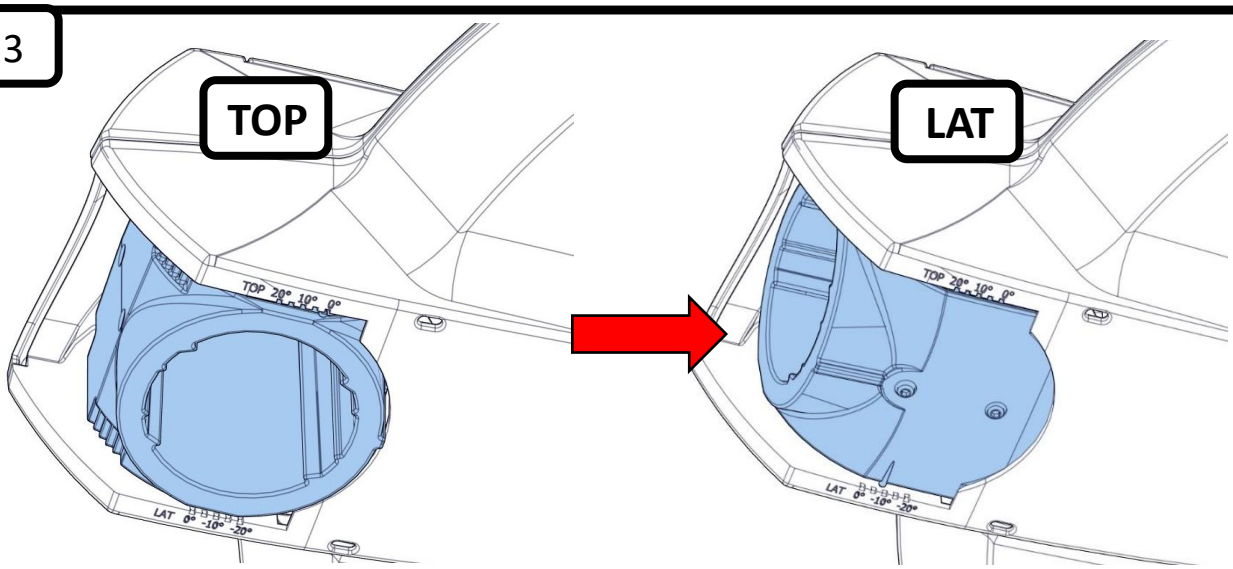

3.1

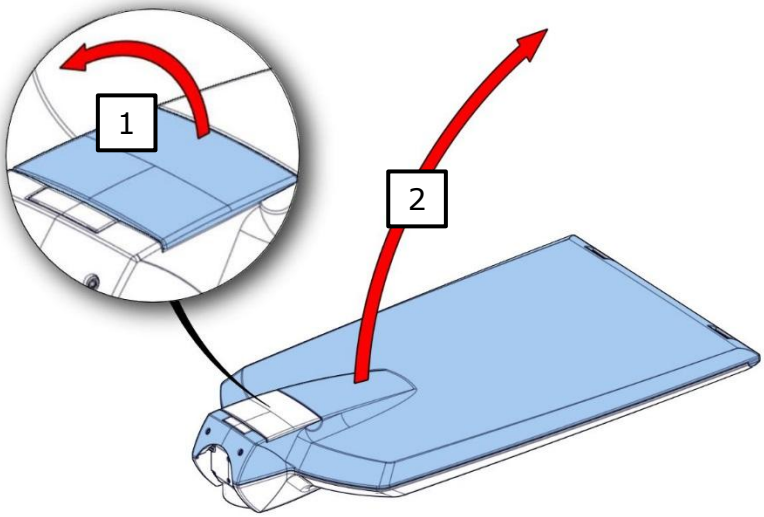


3.2

2x 4


2x 13

TOP

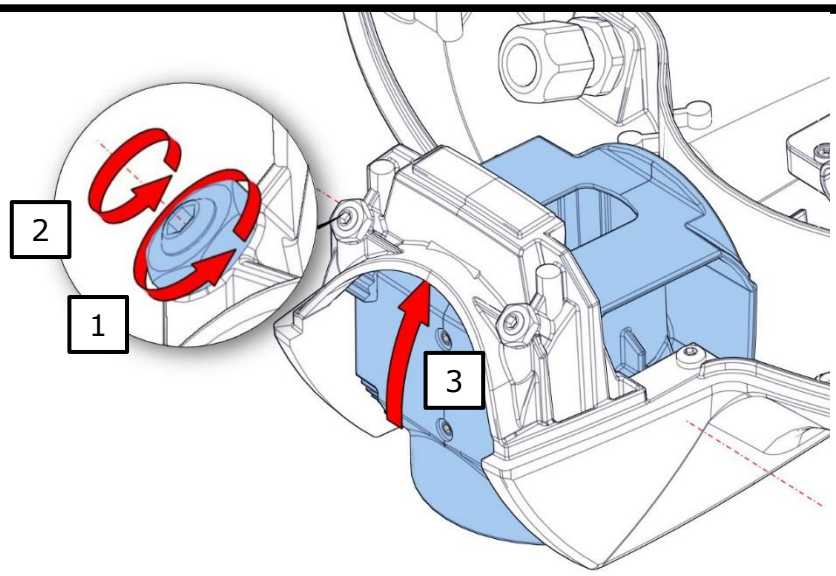

The light source contained in this luminaire must only be replaced by the manufacturer, its maintenance agent or a person with equivalent qualifications.

3.3

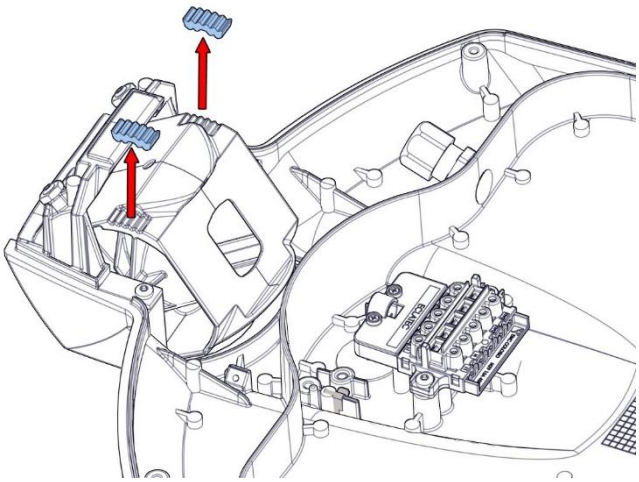


3.4


SIDE

2x 4 8 N·m ±1

2x 13 6 N·m ±1

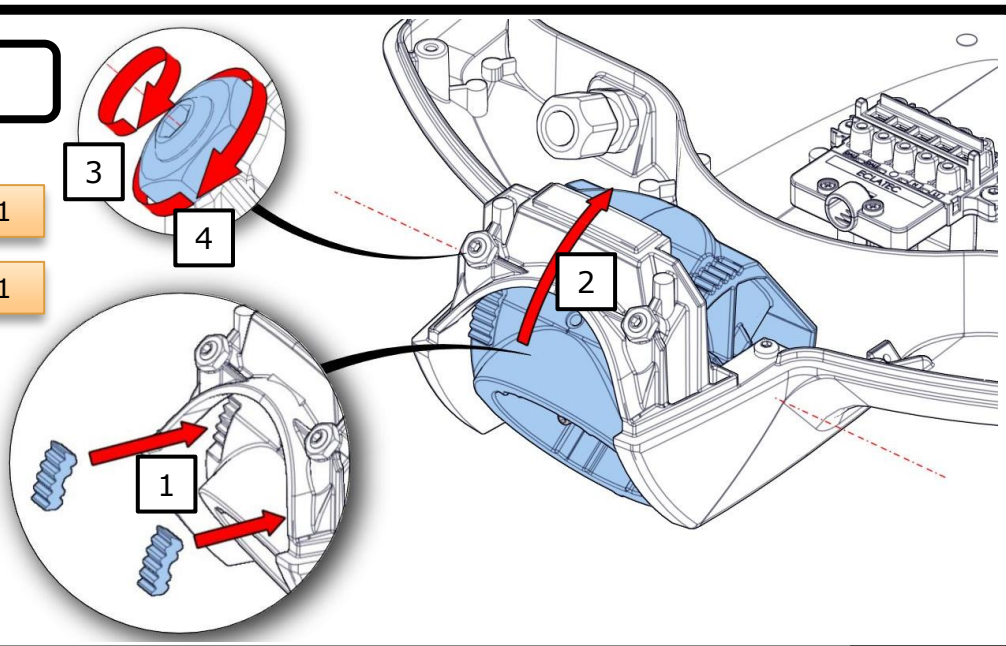

3.5

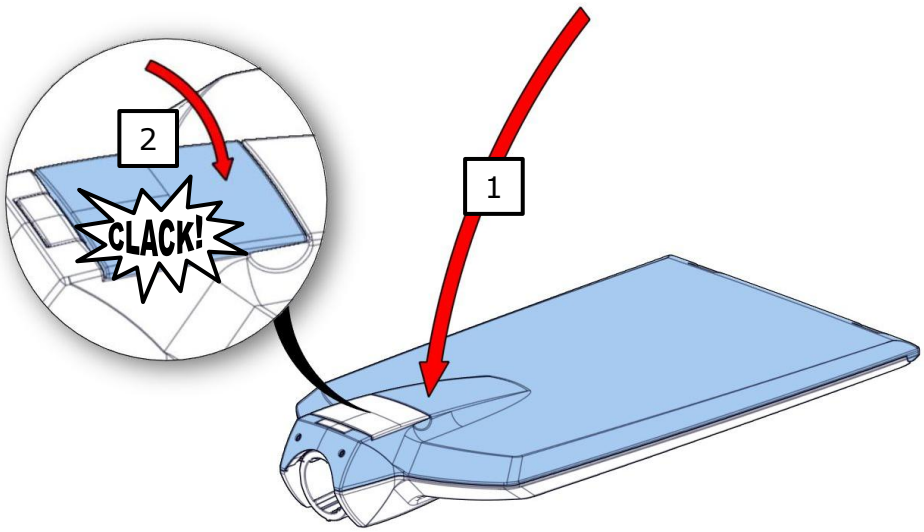

The light source contained in this luminaire must only be replaced by the manufacturer or its maintenance agent, or by a person with equivalent qualifications.