

PIXEL

SPECIFICATIONS


RoHS IP 66 IK 10

PRODUCT NAME	PIXEL BOLLARD
HOUSING	Lighting head and module in die-cast aluminium Metalized cast iron bollard
BOWL	Glass
FINISH	Polyester powder coating, any colour available
SOURCES	BLS 8
COLOUR TEMPERATURE	Amber*, 2200 K, 2400 K, 2700 K, 3000K, 4000 K
OPTICAL	QUADRALENS
FLUX & POWER**	Up to 1962lm; 19W
ELECTRICAL CLASS	Class I or II

*Approx. 1800K
**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)

SMART


- Dimming
- Detection
- WIZARD management system (pag. 420)

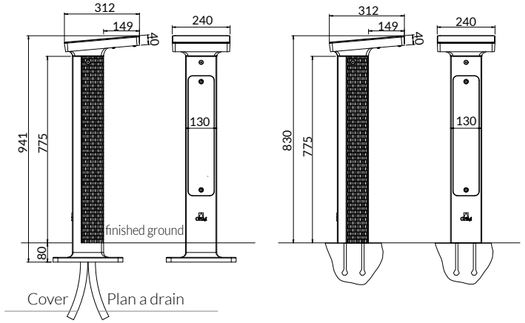

MOUNTING



Cast iron base plate with center distance 200x200mm, or center distance 70x70mm with chemical compound



4 Ø10x150 anchors