


Galvanised steel bracket, 5° tilt.  
 Cylindrical-conical candelabras in galvanised steel.  
**Light fixing:** Ø 60 mm. Others depending on the light.  
**Bracket outreach:** 0.70 m, 1 m and 1.50 m.

## EQUERRE

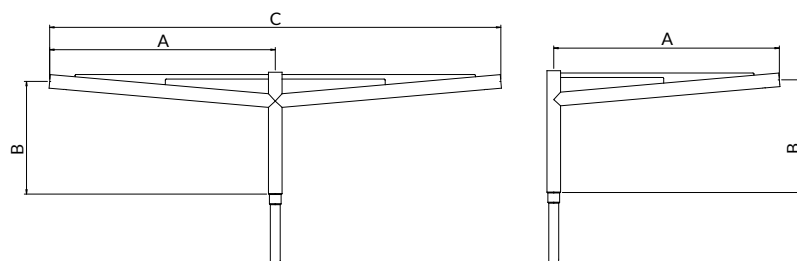

| EQUERRE      | A<br>mm | B<br>mm | C<br>mm | D<br>mm | Tilt | Weight<br>Kg | SCx<br>m <sup>2</sup> |
|--------------|---------|---------|---------|---------|------|--------------|-----------------------|
| Single light | 700     | 500     | ....    | /       | 5°   | 7.2          | 0.20                  |
|              | 1000    | 500     | ....    | /       | 5°   | 9.0          | 0.15                  |
|              | 1500    | 500     | ....    | /       | 5°   | 12.1         | 0.22                  |
| Twin light   | 700     | 500     | 1400    | /       | 5°   | 10.8         | 0.18                  |
|              | 1000    | 500     | 2000    | /       | 5°   | 14.4         | 0.26                  |
|              | 1500    | 500     | 3000    | /       | 5°   | 20.5         | 0.40                  |