KERIS

SPECIFICATIONS

RoHS ZD4i IP 66 IK09

PRODUCT NAME	KERIS 2	KERIS 3	KERIS 4
HOUSING	Injection die-cast aluminium body Optional painted steel lyre		
BOWL	Thermally tempered flat glass		
FINISH	Polyester powder coating, any colour available		
SOURCES	BLS strips		KERIS 4
COLOUR TEMPERATURE	Amber*, 2200 K, 2400 K, 2700 K, 3000 K, 4000 K		3000 K, 4000 K, 5700 K, others on request
OPTICAL	QUADRALENS / Specific		
FLUX & POWER**	Up to 24 617lm 210W	Up to 49 235lm 410W	Up to 71 628lm 503W
ELECTRICAL CLASS	Class I or II		
MOUNTING	U-bracket		

*Approx. 1800K
**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)

Suspended 0°

Suspended 20° Max.

Post top 0°

Vertical or wall

SMART

- Smart-ready® (ZD4i)
- Dimming
- Detection
- Tunable white options
- WIZARD management system (pag. 420)

MECHANICAL INTERFACES

U-BRACKET

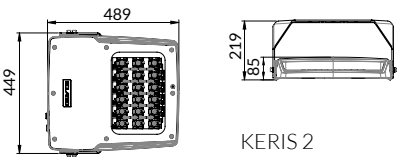

KERIS 2

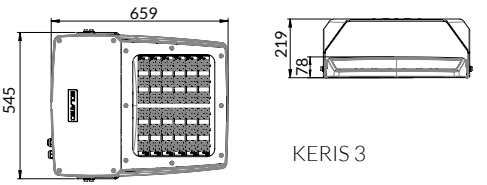

KERIS 3

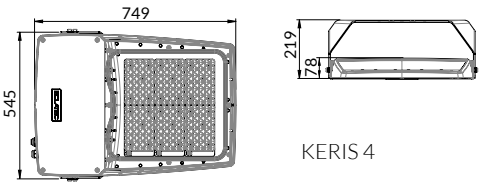

KERIS 4

Design: ECLATEC

KERIS

SPECIFICATIONS

IP 66 IK08

PRODUCT NAME	KERIS 5.1	KERIS 5.2	KERIS 6
HOUSING	Galvanised steel lyre	U-bracket, module interfaces, radiators and electric connection box in injected cast aluminium	
BOWL	In thermally tempered non-reflective glass		
FINISH	Selection of RAL	Modules in grey 2150 sand blasted as standard. U-bracket and module interfaces: aluminium. Other colours on the entire projector optional	
SOURCES	KERIS 5 and 6		
COLOUR TEMPERATURE	3000 K, 4000 K or 5700 K (others on request)		
OPTICAL	Specific		
FLUX & POWER**	Up to 74 646lm 515W	Up to 149 292lm 1010W	Up to 223 938lm 1510W
ELECTRICAL CLASS	Class I		
MOUNTING	U-bracket		

**At 3000K, in accordance with performance standards IEC 62717 and IEC 62722 (+/-5%tolerance)

SMART

- Dimming
- Detection
- WIZARD management system (pag. 420)

MOUNTING

U-BRACKET

KERIS 5.1

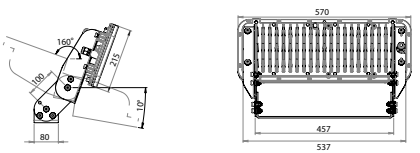

KERIS 5.2

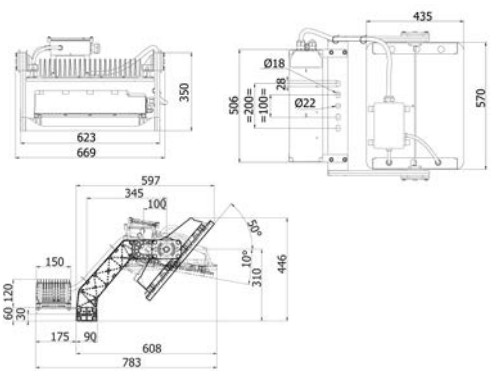

KERIS 6

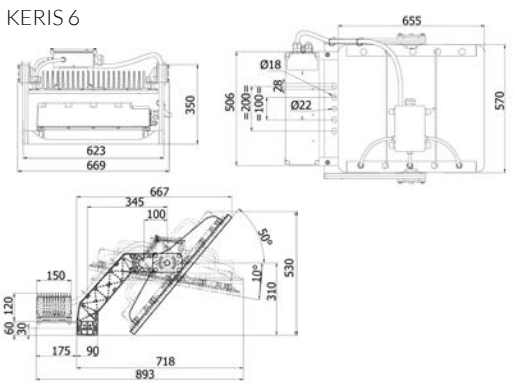

Configuration

6 projectors **KERIS 6**

Configuration

2 projectors **KERIS 4**

KERIS

Configuration

2 projectors **KERIS 5.2**

Configuration

4 projectors **KERIS 6**

Design: ECLATEC

KERIS